


## IC+IC ticket controller



### Specifications

Item code: JSKT6017/5017  
Operating voltage: AC 220/110V±10%, 50Hz~60Hz  
Operating temperature: -25°C +65°C  
Relative humidity: ≤95% no condensation  
Communication interface: TCP/IP  
Black list: 100,000  
User database: 200,000  
Record: 200,000  
IC card distance: 3~5cm  
EM card distance: 5~8cm  
Accuracy of meter: ≤1 second  
Operating system: Windows XP / Windows 2003,  
Windows 7(32 digitals)

### System Topology

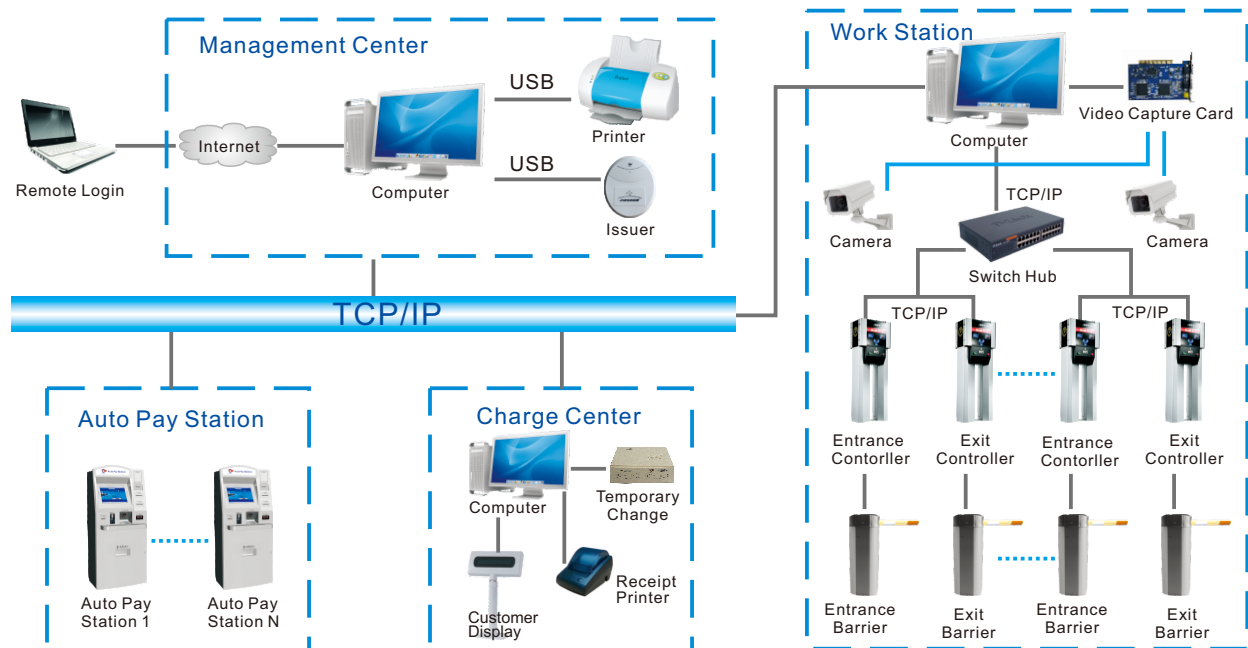

## Features

- > ARM9 processor, high speed with low power consumption.
- > TCP/IP communication, self-adopt 10M/100Mbps net speed
- > High precise RTC, daily tolerance less than 3seconds
- > LED Display, maximum 40 characters display, customer can set up display information on software.
- > Voice prompt
- > IC Card, EM card to customer options
- > Integrated middle/Long range reader WG interface
- > PSAM card encryption authorization
- > Adopt to pinhole camera for image capture.
- > Support discount function
- > Temperature controller is option
- > Support intercom.

## Cases



Office building in Dubai



Shenzhen Long Gang City Center



Shenzhen Golf Course