


# AUDIO DISTRIBUTOR AD-1125



## FEATURES


- **BALANCED INPUT**  
High efficiency electronic balanced circuit is adopted on other to reduce external hum from signal input.
- **INPUT MODE SWITCH**  
This model is able to distribution of the sound signal input to output at 1:10 or 1:5 by mono and stereo selector switch.
- **LEVEL CONTROL AND PEAK LED PER CHANNEL**  
Capable of adjusting each output volume and in case of exceeding input LED lamp warns distortion status.
- **BALANCED OUTPUT AND MINIMIZE THE DC HUMS**  
Signal output is possible whether +or-of the output unit polarity is grounded and the direct current noise is minimized at ±15V power source motivates the operation of circuit.
- **USE OF EMERGENCY BATTER**  
You can operate this model by using emergecny battery for unexpected AC power failure.(Built in DC 24V terminal)

## REAR VIEW

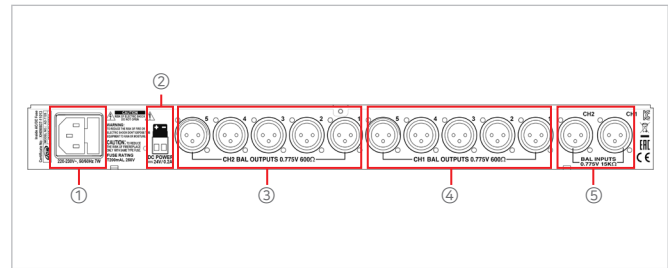

- ① AC POWER
- ② DC POWER
- ③ CH2 OUTPUT
- ④ CH1 OUTPUT
- ⑤ INPUT

## DRAWING

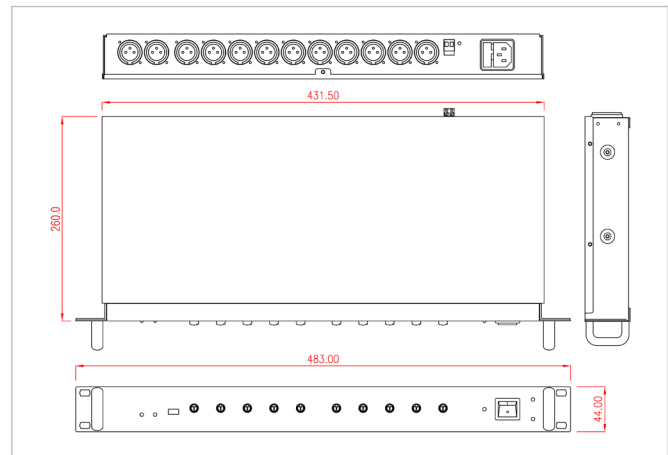

## SPECIFICATIONS

INPUT SENSITIVITY / IMPEDANCE	0.775V(0dBm)/15kΩ bal
OUTPUT LEVEL/IMPEDANCE	0.775V(0dBm)/600kΩ bal
FREQUENCY RESPONSE	Less than -0.5dB(20Hz~20kHz)
SIGNAL TO NOISE RATIO	More than 94dB
T.H.D	Less than 0.04%(20Hz~20kHz)
CROSS-TALK	More than 75dB
POWER CONSUMPTION	6.5W
POWER	AC230V/50Hz, DC24V
DIMENSIONS(mm)	483(W) x 44(H) x 200(D)m/m
WEIGHT(kg)	3kgs

## CONNECTION EXAMPLE

