



CDR-3000 Fault Auto Exchanger

FEATURES

RECEIVER SECTION

- Electronic Digital Tuner
- RDS System Receiver
- Auto & Manual Tuning
- 24 Memory Set (FM:18 , AM:6)
- AF, CT, PI, PS, PTY Function

CD/USB/SD CARD SECTION


- CD Play Function
- Play / Pause Function
- Auto Searching Function
- Repeat Function
- Random Play Function
- Select function for Previous and Next track
- Folder / Track Navigation Function
- Directive Track Select Function (1~999)
- Indicating ID3 Tag
- Protection for Shock Wave by External
- RS-485 communication control function
- Operating CD/USB/SD CARD & AM/FM together
- Remote Control Function (Optional)

TECHNICAL SPECIFICATIONS

RECEIVER SECTION	
Tuner Range	FM : 87.5~108MHz AM : 522~1620KHz
Useable Sensitivity	FM : 6 dBuV AM : 25dBuV
ANT, Impedance	FM : 75Ω UNBAL AM : LOOP ANT
Signal to Noise Ratio	FM : MORE THAN 60dB AM : MORE THAN 50dB
Seek Stop Sens	FM : 25dB (±5dB) AM : 30dB (±5dB)
T.H.D	FM : LESS THAN 0.3% AM : LESS THAN 0.5%
Dimensions	483(W) x 44(H) x 250(D)mm
Weight	5Kg

CD SECTION	
Digital Filter	8 Times Over Sampling
T.H.D	LESS THAN 0.03%
Signal to Noise Ratio	MORE THAN 85dB
Frequency Responses	10Hz~20KHz(±1dB)
WOW Filter	BELOW MEASURABLE LIMITS
Loading Time	6 Sec

REAR VIEW

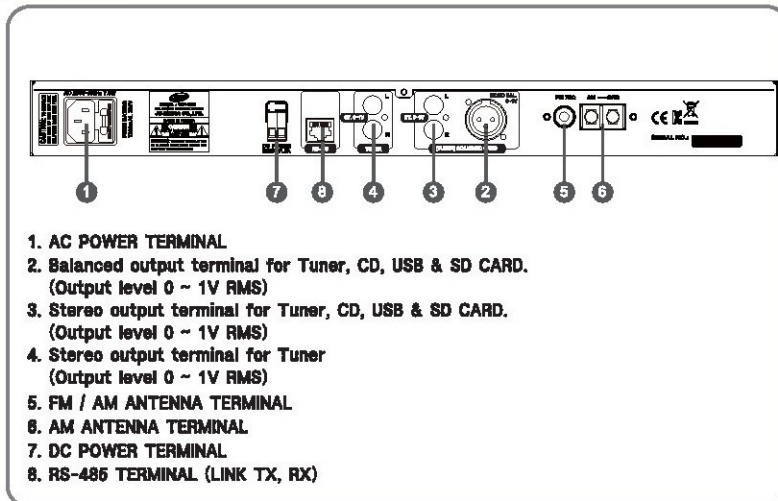

DRAWING

