

Column Speaker CO-160



ACCESSORY




FEATURES

The series CO-100 column speakers feature the "two-way system" and made of stable, stove-enamelled steel sheet, the two covers of high film plastics. This modern, very wide-range, high-performance speaker combined with the tweeter provides excellent speech and reproduction.

- All column speakers in this series are equipped with 100V-matching-transformer and a turn switch for 1/1 - 1/2 - 1/4 and low-impedance power use.
- The "Low-cut switch" on the front side enables to filter out definite low frequencies, which has the effect of an excellent speech transmission.
- The grill is easily removed. It is easy to handle the impedance-and "Low-cut" selector switches. The speaker can be either used indoor outdoord. The scope of delivery contains a mounting set, for pan and tilt.

NO.	PARTS NAME	QTY(EA)	DES.	NO.	PARTS NAME	QTY(EA)	DES.
1	Fling Angle	1		4	Flat Washer	3	
2	Fling Angle	2		5	Hexagonal Nut	1	
3	Hexagonal Bolt	3		6	Spring Washer	3	

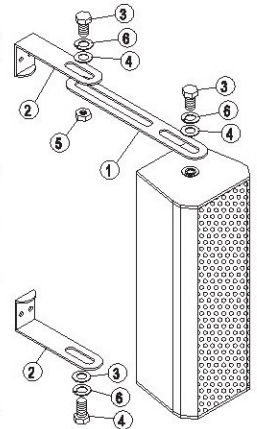

TECHNICAL SPECIFICATIONS

Model	Spec.	Impedance	Power(RMS)			S.P.L.(at 1M/1W ±3dB or Out Power)	Loudspeaker	Size/W x H x D(m/m)	Weight	Direct 8Ω
			100V	70V	50V					
CO-110(S)		1KΩ	10W	5W	2.5W	88~101dB	3 inch x 1	90 x 260 x 85	2kg	10W
		2.5KΩ	4W	2W	1W		2 inch x 1			
		6.8KΩ	1.5W	0.75W	0.38W		3 inch x 2			
CO-120(S)		500Ω	20W	10W	5W	89~103dB	3 inch x 2	90 x 360 x 85	2.5kg	20W
		1KΩ	10W	5W	2.5W		2 inch x 1			
		2KΩ	5W	2.5W	1.3W		2 inch x 1			
CO-130(S)		333Ω	30W	15W	7.5W	90~104dB	3 inch x 3	90 x 470 x 85	3.5kg	30W
		666Ω	15W	7.5W	3.8W		2 inch x 1			
		1.3KΩ	7.5W	3.8W	1.9W		3 inch x 4			
CO-140(S)		250Ω	40W	20W	10W	92~106dB	3 inch x 4	90 x 580 x 85	4kg	40W
		500Ω	20W	10W	5W		2 inch x 1			
		1KΩ	10W	5W	2.5W		2 inch x 1			
CO-160(S)		166Ω	60W	30W	15W	94~107dB	3 inch x 6	90 x 780 x 85	5.5kg	60W
		250Ω	40W	20W	10W		2 inch x 1			
		333Ω	30W	15W	7.5W		2 inch x 1			