


PC-6

Small Diameter Flush-mount Ceiling Speaker Series


As the design and size of the PC-6 corresponds to the commercially available Halogen spotlight, light and sound can be harmoniously integrated. Owing to its wide radiation characteristics the unit is suitable for low-ceilinged rooms with low noise levels. A large area can be evenly radiated with just a few UP 6 speakers. The unit can be installed without the use of tools. Using spring clips the unit can be quickly installed in a ceiling.



Frequency response

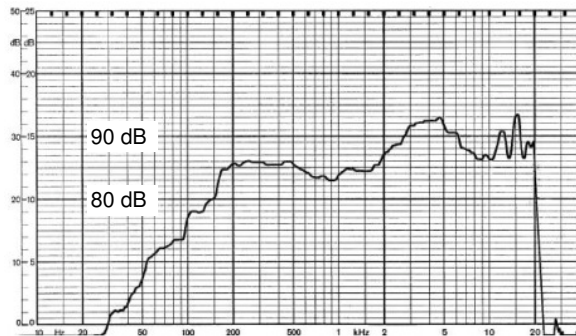

Polar Pattern

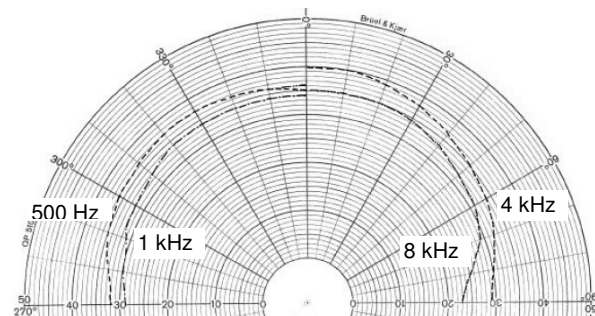

Specifications

Specification	PC-6B	PC-6W	PC-6BM	PC-6WM
rated input power	6 watts R.M.S.			
max. input power	8 watts			
impedance / voltage	4 ohms		100 volts	
Tapping (100V)	-		6W, 3W, 1.5W	
Sensitivity (1W/1m)	86 dB SPL			
Frequency response (-10 dB)	170 - 21,000 Hz			
Coverage angle (-6 dB 1/4/8 kHz)	180°/120°/140°			
Material	housing: plastic, grille: metal			
Grille diameter	100 mm			
Ceiling hole diameter	93 mm			
Ceiling depth	1 - 10 mm			
Mounting depth	42 mm		67 mm	
Terminal (press connector)	2-pole		4-pole	
Colour	RAL 9005 (black)	RAL 9016 (white)	RAL 9005 (black)	RAL 9016 (white)
Weight	0.4 kg		0.6 kg	



TOA Electronics Europe GmbH, Süderstr. 282, 20537 Hamburg, Germany
Tel.: +49 / (0)40 / 25 17 19-0 URL: www.toa.eu

Dovoz, distribuce a prodej v ČR:

AUDIO DIGITAL s.r.o.
www.audiodigital.cz