

4 MP HQA WDR IR Bullet Camera

HB74HD4/HB276HD4

Supercharge your analog security system with Honeywell's HQA technology for high definition 4 MP images over your existing coax infrastructure. The Performance Series 4 MP HQA line includes a wide range of high performing IR cameras that are easy to install and even easier to use.

Superior Image Quality

- Full HD 4 MP 15 fps image (25/30 fps @ 1080p) with a 1/3" 4.1 MP sensor
- Long distance transmission over coaxial cable with low attenuation and latency—up to 1,640 ft (500 m) using RG-59
- True Day/Night provides vivid color images by day and clear black-and-white images at night with ICR
- Excellent low-light performance with 2D/3D noise reduction

Flexible Surveillance Solution

- 3.6 mm fixed lens (HB74HD4) or 2.7-12 mm VF lens (HB276HD4)
- IR LEDs provide up to 131 ft (40 m) for HB74HD4 or 200 ft (60 m) for HB276HD4 of illumination in dimly lit or nighttime scenes (depending on scene reflectance)
- Smart IR technology provides even distribution of IR
- Weatherproof (IP66) camera housing
- -22°F to 140°F (-30°C to 60°C) working temperature
- Plug-and-play compatible with Honeywell HRHT 4/8/16-Channel Hybrid 4 MP HQA DVRs

Easy to Install and Use

- HB74HD4: 12 VDC power input; HB276HD4: 12 VDC/24 VAC power input
- Uses existing BNC cabling—no rewiring required
- Remote configuration through web client or from the DVR



These flexible, fully featured cameras are ideal for a wide range of surveillance applications, providing excellent picture quality at an affordable price.

FEATURES

- Low-light performance down to 0.01 lux (color) or 0 lux with IR LEDs on
- 120 dB True WDR supported
- HQA/CVBS video output
- Pole mount and corner mount options available


4 MP HQA WDR IR Bullet Camera

SPECIFICATIONS


OPERATIONAL	
VIDEO STANDARD	NTSC/PAL
SCANNING SYSTEM	Progressive scan
IMAGE SENSOR	1/3" 4.1 MP CMOS
NUMBER OF PIXELS (H×V)	2688 (H) × 1520 (V)
ELECTRONIC SHUTTER SPEED	NTSC: 1/3 – 1/100 000 s; PAL: 1/4 – 1/100 000 s
MINIMUM ILLUMINATION	HB74HD4: 0.01 lux @ F1.5 (color), 0 lux (B/W with IR LEDs on) HB276HD4: 0.01 lux @ F1.3 (color), 0 lux (B/W with IR LEDs on)
S/N RATIO	65 dB or more
RESOLUTION	4 MP (2560 × 1440)
FRAME RATE	15 fps @ 4 MP; 25/30 fps @ 1080 p, 720p
VIDEO OUTPUT	1-channel BNC high definition video output; 1-channel BNC CVBS video output
IR LEDs	HB74HD4: 2; HB276HD4: 4
IR DISTANCE	HB74HD4: Up to 131 ft (40 m) HB276HD4: Up to 200 ft (60 m) *Depending on scene reflectance
DAY/NIGHT	Auto (ICR)/Color/BW
NOISE REDUCTION	2D/3D
LENS	HB74HD4: 3.6 mm Fixed HB276HD4: 2.7-12 mm VF
PRIVACY MASKING	Up to 8 configurable areas
HORIZONTAL ANGLE OF VIEW	HB74HD4: 79°; HB276HD4: 98°-26°
ELECTRICAL	
POWER SUPPLY	HB74HD4: 12 VDC ±25% HB276HD4: 12 VDC ±25% / 24 VAC ±25%
POWER CONSUMPTION	HB74HD4: 5.9 W max. (IR LEDs On) HB276HD4: 15.4 W max. (IR LEDs On)
MECHANICAL	
DIMENSIONS	HB74HD4: 7.1 × 2.9 × 2.8 in. (181.0 × 74.0 × 70.0 mm) HB276HD4: 8.5 × 3.1 × 2.9 in. (214.8 × 79.7 × 73.4 mm)
WEIGHT	HB74HD4: 0.88 lb. (0.4 kg) HB276HD4: 1.43 lb. (0.65 kg)
CONSTRUCTION	Die-cast aluminum
COLOR	RAL 9003 (White)

ENVIRONMENTAL	
OPERATING TEMPERATURE	-22°F to 140°F (-30°C to 60°C) *Startup should be done at above -22°F (-30°C)
STORAGE TEMPERATURE	-22°F to 140°F (-30°C to 60°C)
RELATIVE HUMIDITY	0-90%, non-condensing
INGRESS PROTECTION	IP66
REGULATORY	
EMISSIONS	FCC PART 15B
SAFETY	UL60950-1
SYSTEM COMPATIBILITY	
HRHT	Hybrid 4 MP HQA DVRs
MOUNTS	
JUNCTION BOX	HB74HD4: HQA-BB1 HB276HD4: HBS2-BB
POLE MOUNT	HB74HD4: HQA-BB1+HQA-PM2 HB276HD4: HBS2-BB+HQA-PM2
CORNER MOUNT	HB74HD4: HQA-BB1+HB34S2-CM HB276HD4: HBS2-BB+HB34S2-CM

HB74HD4

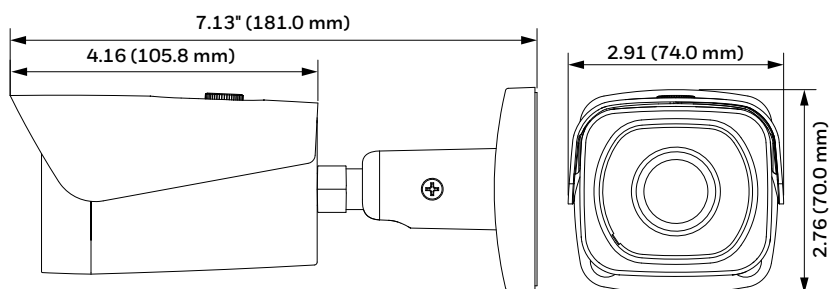

HB276HD4

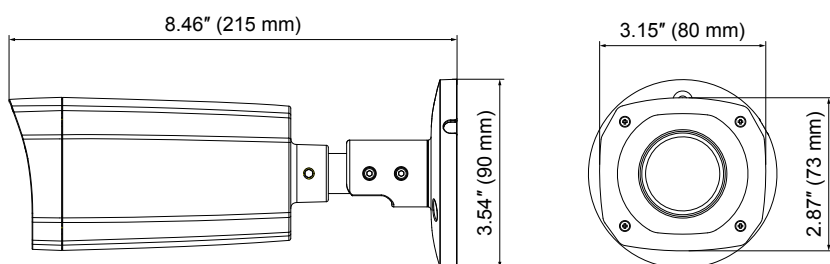

ORDERING

HB74HD4	4MP Analog Bullet Camera, WDR 120dB, 1/3" CMOS, 2.8mm, 2 IR LEDs, TDN, HQA/SD, 12VDC, IP66
HB276HD4	4MP Analog Rugged Dome Camera, WDR 120dB, 1/3" CMOS, 2.7-12mm VF Lens, 2 IR LEDs, TDN, HQA/SD, 12VDC/24VAC, IP66/IK10

For more information

www.security.honeywell.com

Honeywell Commercial Security

715 Peachtree St. NE
Atlanta, GA 30308
1.800.323.4576
www.honeywell.com

Honeywell reserves the right, without notification, to make changes in product design or specifications.

HCS-4MPIRBD-02-US(0419)DS-E
© 2019 Honeywell International Inc.

Honeywell