

PRE AMPLIFIER
MA-1410



FEATURES

- 1/4" TRS phone jack for monitor of channel input.
- 2 individual XLR balanced master-outputs with bass/treble and LED indicators.
- 10 input / 2 zone output pre-amp mixer.
- Line/Mic/Mic-lowcut with phantom selector on each channel.
- Automatic priority for channel 1-3.
- 10 channels with individual master-output selector (output 1, output 1+2, output 2).
- High Pass Filter.
- AC operation - DC 24V operation.
- Input signal indicator.
- Recording output.
- DIN connection for P.T.T. remote on ch.1 (PTT-100N).
- Signal input by XLR (2-10) & RCA channel 7-10.
- 4 or 2 tone chime with internal tone selector.


SPECIFICATIONS

INPUT SENSITIVITY IMPEDANCE	MIC/LINE : -50dBu(2.45mV/5kΩ bal
	-10dBu(245mV)/5kΩ bal
	LINE RCA IN : -10dBu(245mV)10kΩ unbal
OUTPUT LEVEL IMPEDANCE	Master 1, 2 : Nor +4dBu(1.23V)/200Ω bal
	REC : Nor 0dBu(0.775V)10kΩ unbal
FREQUENCY RESPONSE	Less than -0.5dB (20Hz ~20kHz)
SIGNAL TO NOISE RATIO	MIC : More than 60dB
T.H.D AT 1KHZ	LINE : More than 75dB
	MIC : Less than 0.04%
	LINE : Less than 0.02%
CROSS-TALK	MIC : More than 60dB
	LINE : More than 75dB
POWER CONSUMPTION	9.9W
POWER	AC230V/50Hz, DC24V
DIMENSIONS(mm)	483(W) x 44(H) x 200(D)mm
WEIGHT(kg)	4kg

PTT-100N (Option) P.T.T REMOTE



DRAWING

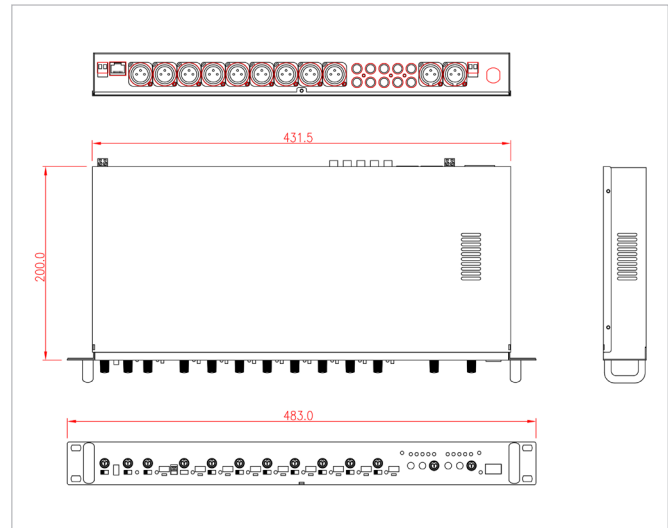

REAR VIEW

