

IID-TFR0250N-0

Multi – Biometric T&A and Access Control Terminal




Key Feature:

- Fingerprint, face, and password 4 type verification mode
- High-speed identification less than 1 second
- TCP/IP Port for Internet connection
- Access Port available to control one lock and exit button
- Optional 5V 1900mAH UPS, standby up to 3 hours



Product		IID-TFR0250N-0
Main	Biometric	Fingerprint and Face
Capacity	Max User(1:N)	1:1000
	Max Fingerprint(1:N)	1:500
	Max Face (1:N)	1:200
	Max Record	50,000
Interface	TCP/IP	10M/100M USB
	USB	2.0 (Host) 1
	Relay	Relay
Hardware	LCD	2.8" Color LCD
	Sound	Stereo speaker
	Operating Temp.	0 °C- 45 °C
	Operating Humidity	20% ~ 80%
	Power	DC 5V 0.8A
	Dimensions(W x H x D mm)	167.9 x 151.5 x 30
Function	Standard	AutomaticStatusSwitch, Self-Service Query, DST,T9 Input 9 Digit User ID, Scheduled Bell, Photo ID Lock, sensor, Exit button

Configuration:

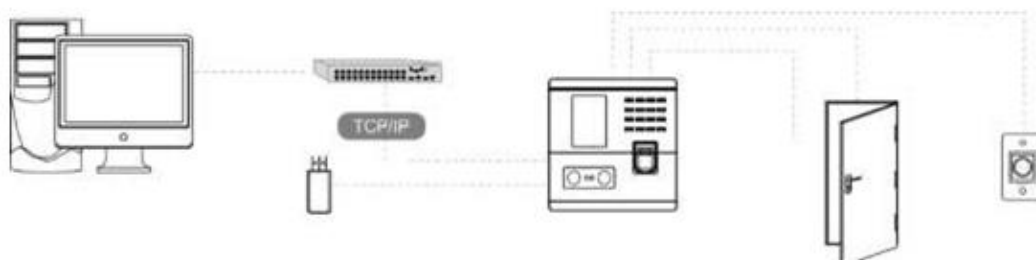

www.iid2secure.nl
Extra Benefits, Less Price
Finestrat,19, 03530 La Nucia, Alicante, Spain
© IID Secure Tech S.L.U. 2019

Heemdedestraat 16 Amsterdam, Netherlands
Support@iid2secure.nl
+31614762425
Data Subject to change without notice