

MAG2 Conventional Fire Alarm Panel

EN54-2/4

Description

MAG2 is a conventional fire alarm panel certificated by EN54-2/4, providing 2 fixed zones. Up to 20 (32 SensoMAG Series) fire detectors can be connected to every fire zone. Unlimited number of call points can be connected to every of the fire zones.

MAG2 is situated in a metal box with compact size. The panel is easy for installation and maintenance and provides user-friendly daily operation. The panel is suitable for residential, small and middle office applications with protected area up to 1000m².

The panel is available in different language versions for the front panel.




CE 16
1293

DoP No: 075

1293-CPR-0510

Technical and Environmental Specifications

Main Power Supply	~230VAC ± 10%
Frequency	50/ 60Hz
Back-up Power Supply	1 battery, 12V/ 7Ah
Power availability	0.7A
Main power supply fail consumption.	50mA
Outputs (<i>sounder circuits on the control PCB module</i>)	2; 24V/ 0.3A fuse
Output, FAULT Relay	1; 3A@120VAC; 3A@60VDC
Output, FIRE Relay	1; 3A@120VAC; 3A@60VDC
Auxiliary output	24VDC/ 0.3A fuse
Fixed zones	2
Detectors per zone / max. number of detectors	32/ 64
Multi language front panels.	YES
Operating temperature	0°C to +40°C
Relative humidity resistance	(93 ± 3)% @ 40°C
Weight (without battery)	~2.7kg
Dimensions of the metal box.	200x290x80mm

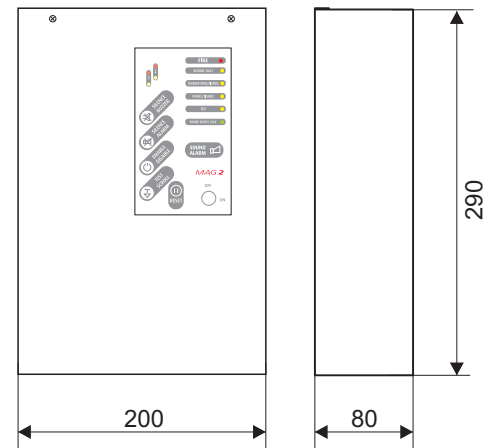

Compatible Product Range

- **SensoMAG Series** - Conventional detectors
- **SF Series** - Conventional sounders
- **SF100 Series** - Conventional sounders

Contact Information:

MAG2 Conventional Fire Alarm Panel

EN54-2/4

● Packing Information

- **Single packing box** - 1 unit MAG2 Fire Alarm Panel, dimensions 330x221x85mm
- **Carton packing box** - 5 units MAG2 Fire Alarm Panel, dimensions 520x225x338mm

● Available Languages

- English
- German
- Portugal
- Estonian
- Romanian
- Italian
- Dutch
- French
- Finnish
- Bulgarian
- Turkish
- Spanish
- Hebrew

● Contact Information: