

MONITOR UNIT MU-2307




FEATURES

- Permissible monitor for 10pcs-power Amplifier output by monitor selector.
- Level adjustment of input level for each monitor.
- Permissible signal input 1V~100V according to setting for monitor input.
- LED meter per monitor input.
- Two way monitors by speaker built-in or headphone.
- No problem by potential difference between MU-2307 and product unbalanced. Due to balanced input circuit.
- AUX input for monitor of pre AMP out.
- Monitoring up to 10 channels with individual LED meters.
- Variable Input signal ranges from 1V to 100V.
- Monitoring pre-amp out by extra aux input.
- Input level Monitor adjustment.
- +/- input and GND of circuit is insulated.

SPECIFICATIONS

INPUT SENSITIVITY/IMPEDANCE	1V-100V / 10kΩ bal.
RATED MONITOR	speaker : 2W max.
	headphone : 0.1W max.
FREQUENCY RESPONSE	Less than -3dB (100Hz ~ 20kHz)
T.H.D(1KHZ)	Less than 0.04%
POWER CONSUMPTION	12W(all operation)
	8.5W(1ch operation)
POWER(OPTION)	AC230V/50Hz, 24VDC
DIMENSIONS(mm)	483(W) x 88(H) x 200(D)mm
WEIGHT(kg)	4.8kg

REAR VIEW

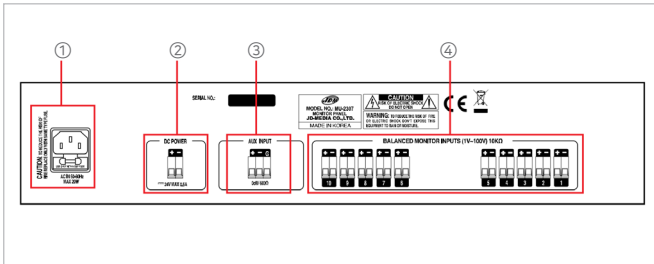

- ① AC POWER
- ② DC POWER
- ③ AUX IN
- ④ BALANCED INPUT

DRAWING

