

4 ZONE PRE AMPLIFIER (6 INPUTS 4 OUTPUTS)

MX-604




FEATURES

SPECIFICATIONS

INPUT SENSITIVITY / IMPEDANCE	MIC/LINE : -50dBu(2.45mV)/5KΩ bal
	-10dBu(245mV)/5KΩ bal
	LINE REC IN : -10dBu(245mV)15KΩ unbal
	TEL PAGING : -10dBu(245mV)10KΩ bal
OUTPUT LEVEL / IMPEDANCE	PRE : 0dBu(775mV) 200Ω unbal
	REC : 0dBu(775mV) 3KΩ unbal
FREQUENCY RESPONSE (LINE SIGNAL)	Less than -1dB (20Hz~20KHz)
SIGNA TO NOISE RATIO	MIC : More than 65dB
	LINE : More than 87dB
T.H.D(1KHZ)	MIC : Less than 0.1%
	LINE : Less than 0.05%
CROSS-TALK	MIC : 60dB
	LINE : 70dB
POWER CONSUMPTION	12.6W
POWER SOUREC	AC 220V / 60Hz, DC 24V
DIMENSIONS(mm)	483(W) X 88(H) X 260(D)
WEIGHT(kg)	4.4kg

REAR VIEW

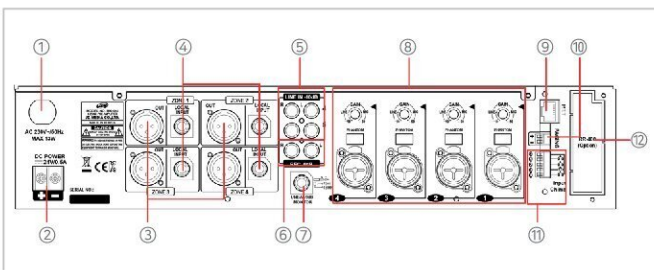

- ① AC POWER
- ② DC POWER TERMINAL
- ③ OUTPUTS
- ④ LOCAL INPUT
- ⑤ LINE INPUT
- ⑥ RECORDING OUTPUT
- ⑦ MONITOR OUTPUT
- ⑧ MIC/LINE INPUT
- ⑨ P.T.T INPUT JACK
- ⑩ PAGING INPUT TERMINAL
- ⑪ CHIME CONTROL
- ⑫ REMOTE RECEIVER(RR-400 OPTION CARD)

DRAWING

