


CEILING SPEAKER

CS-405

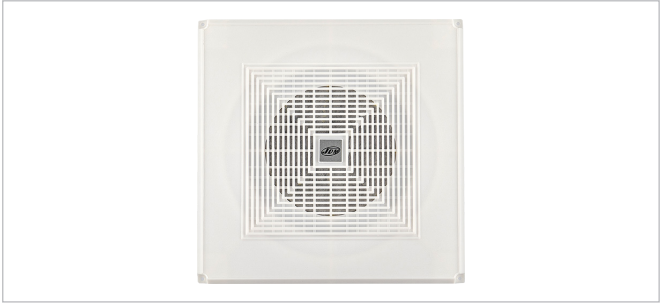

SPECIFICATIONS

INPUT(RMS)	5W
FREQUENCY RESPONSE	50Hz~16kHz
S.P.L	94dB
MATERIALS	ABS
IMPEDANCE	2kΩ(ORG)
DIMENSION	303 × 303 × 85mm
WEIGHT	1.5kg

CEILING SPEAKER

CS-605



SPECIFICATIONS

RATE POWER	5W
FREQUENCY RESPONSE	160Hz~15kHz
S.P.L	90dB ±3dB
IMPEDANCE	2kΩ
MATERIALS	Matal Housing, ABS Frame
MOUNTINHG HOLE	Ø90mm
DIMENSION	Ø220 × 65mm
WEIGHT	1.3kg

CEILING SPEAKER

CS-610



SPECIFICATIONS

INPUT(RMS)	10W
IMPEDANCE	1kΩ, 2kΩ
FREQUENCY RESPONSE	160Hz~15kHz
S.P.L	91dB ±3dB
MOUNTINHG HOLE	Ø195mm
MATERIALS	Aluminum
DIMENSION	Ø220 × 65mm
WEIGHT	1.5kgs

CEILING SPEAKER

CS-630



SPECIFICATIONS

OUTPUT	30W
LINE VOLTAGE	100V
FREQUENCY RESPONSE	150Hz~15kHz
S.P.L	102dB
MOUNTINHG HOLE	Ø170mm
MATERIALS	ABS
DIMENSION	Ø200 x 95mm
WEIGHT	1.1kgs