


JAD-125A

FRONT VIEW

Audio Distributor



REAR VIEW

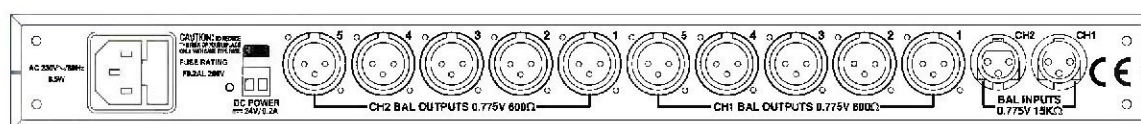

FEATURES

- High quality electronic balanced inputs & outputs.
- All XLR connectors.
- 10ch mono, 5ch stereo.
- Output volume control.
- Low noise power supply.(operating voltage 15V).
- AC operation – DC 24V operation.

SPECIFICATIONS

Input sensitivity / Impedance	0.775V(0dBm)/15k Ω bal
Output level / Impedance	0.775V(0dBm)/600 Ω bal
Frequency response	Less than -0.5dB(20Hz ~20kHz)
Signal to noise ratio	More than 94dB
T.H.D	Less than 0.05%(20Hz ~20kHz)
Cross-talk	More than 75dB
Power consumption	6.5W
Power Source	AC 230V/240V 50/60Hz, DC 24V
Dimensions(mm)	483(W) x 44(H) x 200(D)
(inch)	19(W) x 1.7(H) x 7.9(D)
Weight(kg/lbs)	2.9 / 9.9

Drawing

