

The AT-303AP is a flush-mounted wall attenuator and uses a transformer which allows connection of a wide range of loads (30 W or less). Volume can be adjusted in five steps. The AT-303AP features push-in terminal block for easy connection.




Article number: AT-303AP

Specifications


Finish	ABS resin, white,
Operating temperature	-10 °C to +50 °C

Appearance

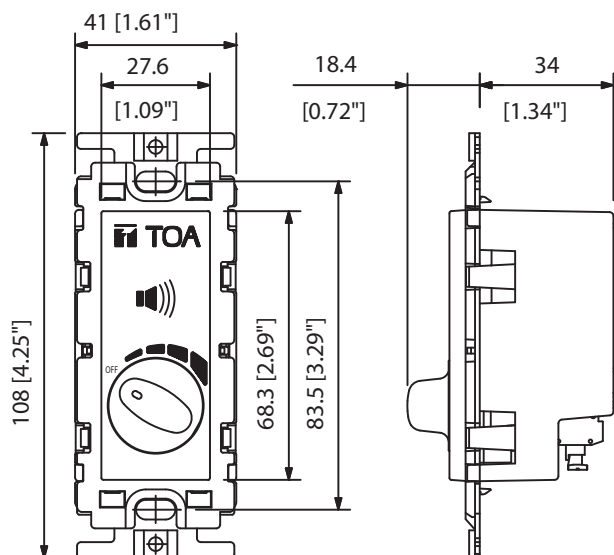

Front View

Side View

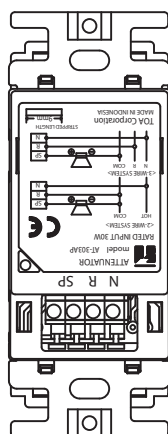

Rear View



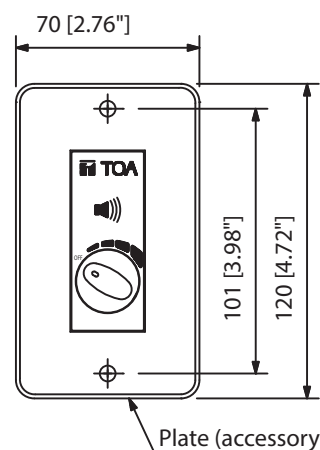


Figure with the supplied plate attached

(SCALE:1/3)

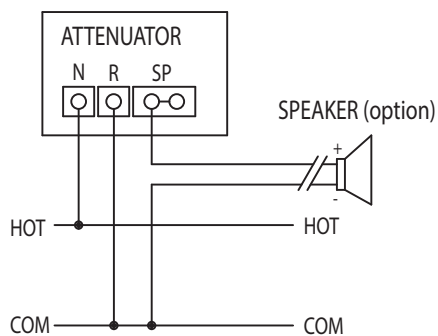

2-WIRE SYSTEM

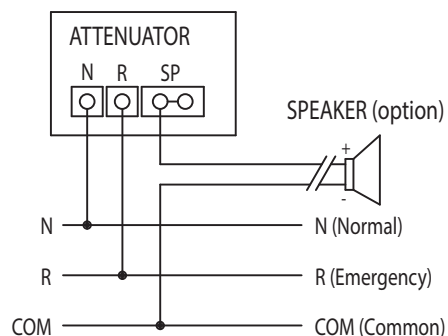

3-WIRE SYSTEM

UNIT:mm

SCALE:1/2