



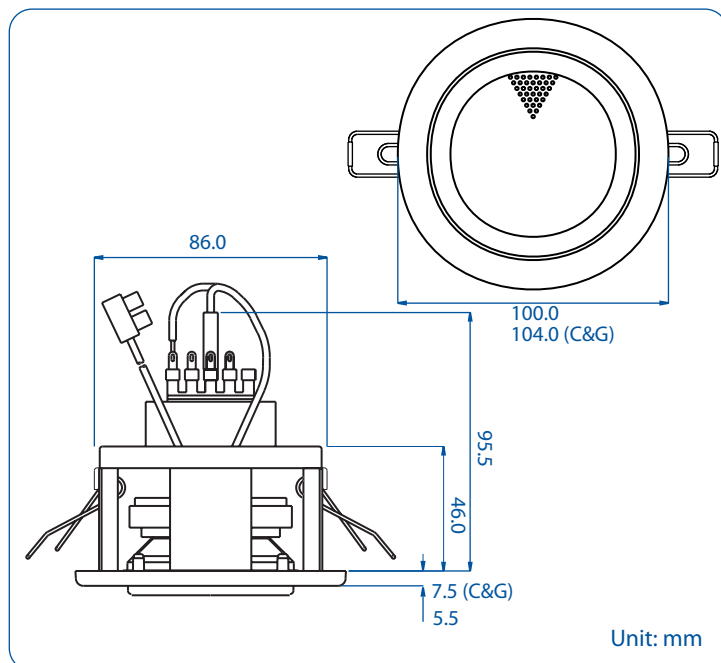

SLC-2060 Series Spotlight Ceiling Loudspeaker

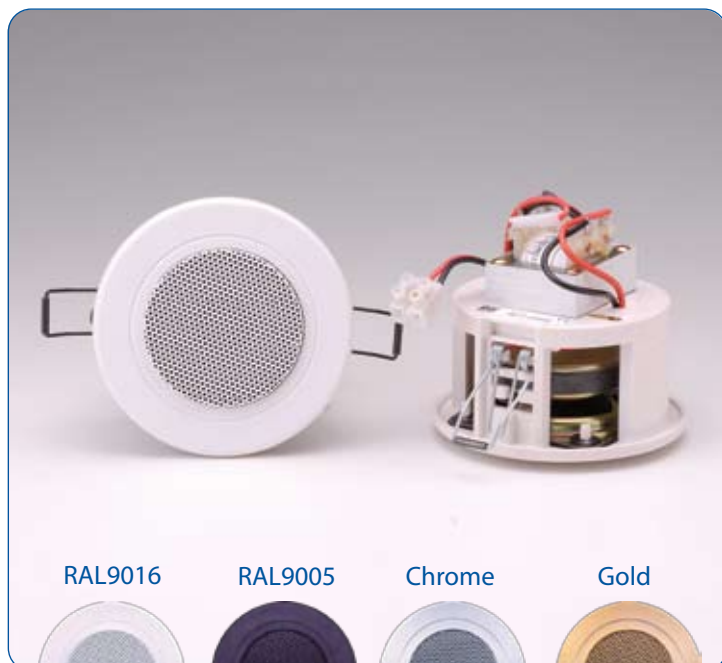

- ☒ 100 Hours Life Tested
- ☒ CE Certified (EMC & LVD)
- ☐ IP Rated
- ☐ Rustproof
- ☐ UL94V0
- ☐ BS 5839 Part 8
- ☒ EASE Data
- ☒ RoHS Compliance
- ☐ UV Protected
- ☒ Withstanding/Insulation Tested

- Designed to look like ceiling spotlights.
- Same size and fixing mechanism as spotlights.
- Remarkable sound quality from small unit.
- 2.5" full range driver unit.
- 100mm diameter grille. Gold & Chrome options have a grille diameter of 104mm.
- Designed for unobtrusive installation.
- Available in four colour options:
 - SLC-2060 --- White
 - SLC-2060B --- Black
 - SLC-2060C --- Chrome
 - SLC-2060G --- Gold

Model No.	SLC-2060	SLC-2060B	SLC-2060C	SLC-2060G
Rated Power (rms)	6W			
Impedance	833Ω, 1.67kΩ, 3.33kΩ & 6.67kΩ			
Power Taps @ 100V	6W, 3W & 1.5W			
Power Taps @ 70V	6W, 3W, 1.5W & 0.75W			
SPL (1W / 1M)	86dB			
Max. SPL (Rated W / 1M)	93dB			
Frequency Range (-10dB)	150Hz ~ 20KHz			
Dispersion 1K Hz / 4K Hz	200° / 80°			
Ambient Temperature	-30°C ~ +60°C			
Power Selection	Plug			
Material	Baffle: ABS with fibre, Grille: Steel			
Colour / Finish	White (RAL 9016) / Black (RAL 9005) / Chrome / Gold			
Dimensions	100.0 (3.94) C & G: 104 (4.09) Dia. X 95.5 (3.76) Height mm. (in.)			
Cutout Size	92.0 (3.62) Dia. mm. (in.)			
Net Weight (ea)	0.55 kgs (1.21 lbs)			
Mounting	Spring			