




CPC-6061EC

Clip-Mount Plastic Ceiling Loudspeaker

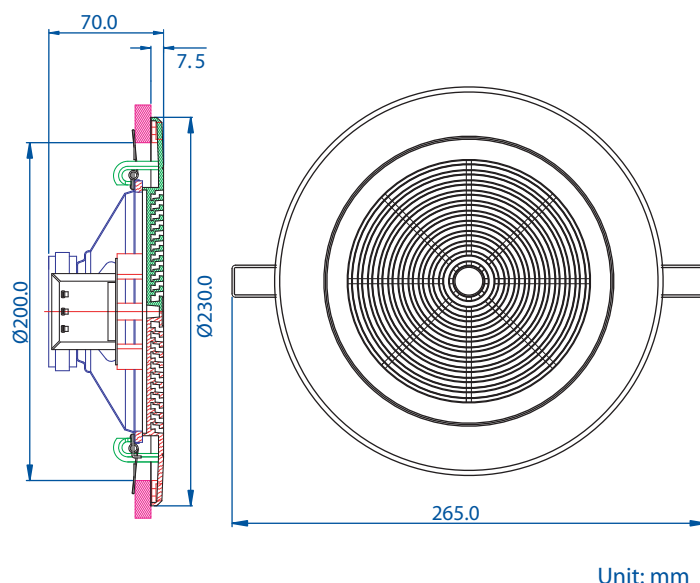

- ☒ 100 Hours Life Tested
- ☒ CE Certified (EMC & LVD)
- ☐ IP Rated
- ☐ Rustproof
- ☐ UL94V0
- ☐ BS 5839 Part 8
- ☒ EASE Data
- ☒ RoHS Compliance
- ☐ UV Protected
- ☒ Withstanding/Insulation Tested

- Low profile grille design.
- Fast fitting and economical spring design.
- Ideal for shallow ceiling voids.
- Fitted with a twin cone driver unit.
- Designed to offer a wide response for music & speech.
- 6 watt transformer with multi tapplings down to 1.5W (100V) & 0.75W (70V).
- High impact ABS grille.
- Finished in brilliant white (RAL 9016).

Model No.	CPC-6061EC
Rated Power (rms)	6W
Impedance	1.67kΩ, 3.33kΩ, & 6.67kΩ
Power Taps @ 100V	6W, 3W, & 1.5W
Power Taps @ 70V	3W, 1.5W, & 0.75W
SPL (1W / 1M)	90dB
Max. SPL (Rated W / 1M)	99dB
Frequency Range (-10dB)	100Hz ~ 20KHz
Dispersion 1K Hz / 4K Hz	120°/90°
Ambient Temperature	-30°C ~ +60°C
Power Selection	Plug
Material	Baffle: High impact ABS
Colour / Finish	White (RAL 9016)
Dimensions	230.0 (9.06) Dia. X 70.0 (2.76) Height mm. (in.)
Cutout Size	200.0 (7.87) Dia. mm. (in.)
Net Weight (ea)	0.85 kgs (1.87 lbs)
Mounting	Spring-clip