




ATT-0101 & 0201 Series Attenuator (Volume Control)

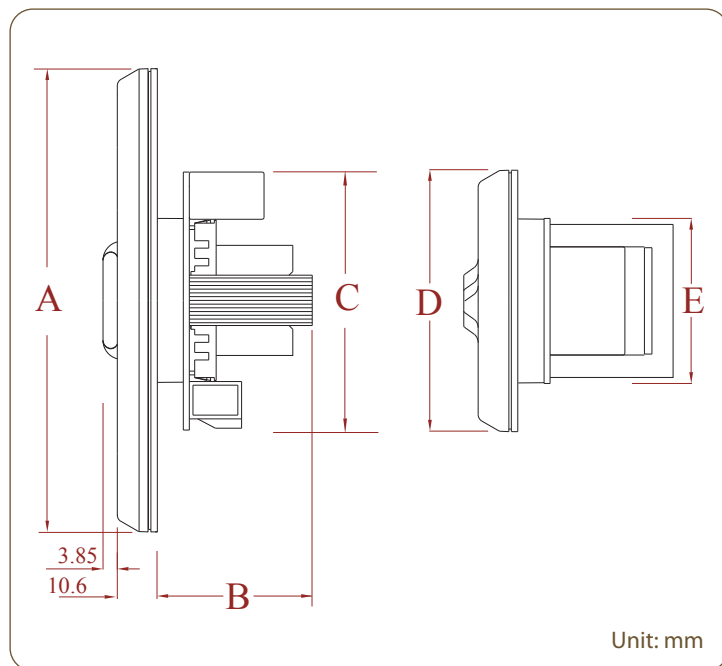

Unit: mm

- ☒ 100 Hours Life Tested
- ☒ CE Certified (EMC & LVD)
- ☐ IP Rated
- ☐ Rustproof
- ☒ UL94V0
- ☐ BS 5839 Part 8
- ☐ EASE Data
- ☒ RoHS Compliance
- ☐ UV Protected
- ☒ Withstanding/Insulation Tested

- Unique Low-profile design.
- Hardware free fascia.
- 12 position (inc. off) "Smooth Click" rotary switch with 360 degree operation.
- 10 & 20 watt and 100 volt line options.
- Designed for flush mounting or surface mounting via SUB-0200 back box.
- High quality auto transformer for excellent frequency response, low insertion loss and reliability.
- Optional priority relay (ATT-0101P & ATT-0201P) bypasses attenuator in emergency or priority paging announcements.
- High Impact ABS self extinguishing UL94V0 construction.
- Standard colour is White (RAL 9016).

Model No.	ATT-0101	ATT-0201	ATT-0101P	ATT-0201P
Rated Power (rms)	10W	20W	10W	20W
Line Voltage	100V			
Switch Position	11 + off			
Attenuation Per Step	3 dB (On the last 2 steps the power drops off 6 dB per step for better control on the low end)			
Total Attenuation	36 dB			
Insertion Loss	Less than 0.5 dB			
Priority	N. A.		Available	
Relay Spec.	N. A.		Coil 24V DC 22mA, Contacts rating 10A	
Plate Size	Single Gang			
Material	Cover & Wall Plate: UL94V0 High Impact ABS			
Colour / Finish	White (RAL 9016)			
Dimensions A mm (in)	124 (4.88)			
Dimensions B mm (in)	38.5 (1.52)	42.5 (1.67)	38.5 (1.52)	42.5 (1.67)
Dimensions C mm (in)	69.5 (2.74)			
Dimensions D mm (in)	70 (2.76)			
Dimensions E mm (in)	44.5 (1.75)			
Net Weight (ea) Kgs (lbs)	0.2 (0.44)	0.29 (0.64)	0.2 (0.44)	0.29 (0.64)
Recommended Flush Box	Standard U. S. A. Boxes at least 2-1/4" deep, BTICINO art. 503E (ITALY) or equivalent			