




SAIL BLINKER



ACG7072 SAIL BLINKER orange
LED flasher, multi-power supply
24Vdc, 24÷230Vac
with built-in 433 MHz aerial
IP 44



ACG7078 SAIL BLINKER white
LED flasher, multi-power supply
24Vdc, 24÷230Vac
with built-in 433 MHz aerial
IP 44

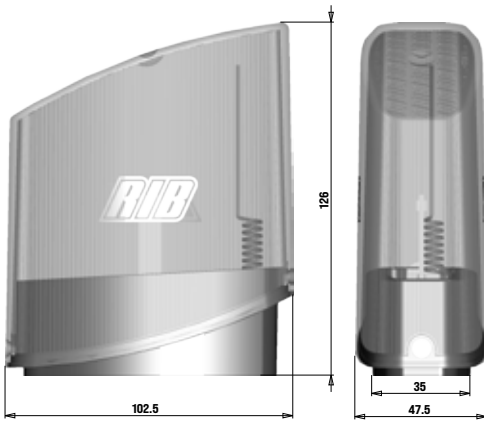

ACG8054 LATERAL SUPPORT
for SAIL BLINKER



TRAFFIC LIGHT



ACG5531 TRAFFIC LIGHT
RED 2.0 / GREEN 24V
160x355x280mm

Traffic light particularly suitable for condominium streets, garages, narrow passages with alternating traffic and private roads
Lens diameter: 120 mm
Illumination: boards with 25 high brightness LEDs each
Degree of protection: IP 65
Operating temperature: -20°C + 60°C
Power supply: 12 - 24 V ac / dc
Power absorption : 3W for each board



EN 13241:2016 WARNING PLATE



ACG9624 WARNING PLATE
as requested by EN 13241:2016
Standard

Warning sign compliant with EN 13241:2016 to be installed on any type of automatic gate (Machinery Directive 2006/42/EC)