




BioLite Net

Configuration

Standalone | Standalone-Secure | Distributed Access Control Systems

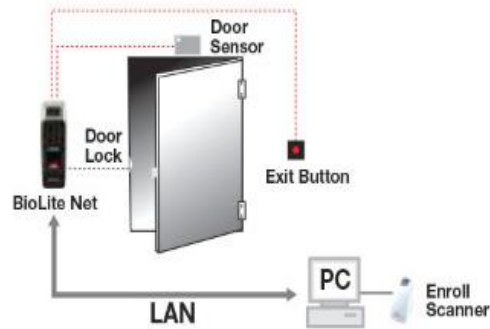

Model Name		BLR-OC	
RFID	RF Option	125 KHz EM	13.45MHz MIFAI
	Mobile Card	Not supported	Not supported
Protections	Ingress Protection	IP65	IP65
	Vandal Proof	Not supported	Not supported
Fingerprint	Template	SUPREMA / ISO 19794-2 / ANSI 378	SUPREMA / ISC
	Extractor / Matcher	MINEX certified and compliant	MINEX certifiec
	Live Fingerprint Detection	Not supported	Not supported
Capacity (Fingerprint)	Users (1:1) * Based on one finger enrollment per user	5,000	5,000
	Users (1:N) * Based on one finger enrollment per user	5,000	5,000
	Max. Finger per User	10	10
	Text Log	50,000	50,000
	Image Log	Not supported	Not supported
CPU	CPU	533MHz DSP	533MHz DSP
	Memory	16MB RAM + 8MB Flash	16MB RAM + 8
	LCD Type	128x64 Graphic LCD (Monochrome)	*128x64 Graphi