

## CADC600PIV-V

### 600TVL HIGH RESOLUTION VANDALPROOF IR VARIFOCAL DOME CAMERA

Honeywell Vista series CADC600PIV-V vandalproof IR vari-focal dome camera is designed for commercial and residential surveillance, and is ideal for any indoor or outdoor applications.

Featuring a high resolution with 600TVL with outstanding image sharpness, 2.8 – 10mm vari-focal lens, up to 15m IR visible range, anti-flare double glass and intelligent IR, the CADC600PIV-V is most suitable for night time and dim environment surveillance. Equipped with IP66 housing, the CADC600PIV-V is vandalproof and weatherproof that can be installed in any outdoor applications.

Installation is quick and easy. The CADC600PIV-V comes completely assembled and ready-to-use to maximize installation flexibility—the camera fits perfectly in any locations on ceiling, wall and covert corner.

#### Market Opportunities

The CADC600PIV-V is a vandalproof IR dome camera which can be widely used in mid-scale indoor and outdoor sites. It is a peace of mind security tool for property owners to protect their residential apartment, commercial buildings, retail stores, offices, warehouses, shopping malls and clinics.

#### FEATURES

- High resolution 600TVL images
- 2.8 - 10mm Vari-focal Lens
- 10 – 15m IR Visible Range
- 0 Lux (IR LED ON)
- Privacy masking (8 zones); Motion detection (4 zones)
- With OSD
- IP66
- Intelligent IR Compensation
- 12 VDC Input Voltage



### CADC600PIV-V

www.black.honeywell.com

#### 600TVL HIGH RESOLUTION VANDALPROOF IR VARIFOCAI DOME CAMERA

##### SPECIFICATIONS

Model	CADC600PIV-V	CADC6000NIV-V
Image Sensor	1/3" SONY Super HAD II CCD	
Signal System	PAL	NTSC
Effective Pixels	752(H) x 582(V)	768(H) x 494(V)
Horizontal Resolution	Color 600 TVL; B/W 650 TVL	
Lens	Vari-focal Lens f=2.8 - 10mm	
IR LED	850nm, 21pcs IR LED	
IR Beam Distance	10 - 15m	
Minimum Illumination	0.1 Lux (IR LED OFF) / 0 Lux (IR LED ON)	
S/N Ratio	More than 52dB	
AES	1/50 - 1/100,000 sec	1/60 - 1/100,000 sec
WDR	Digital WDR	
DNR	2D DNR	
BLC	BLC/HLC	
Mirror	Horizontal	
White Balance	ATW / Push / User1 / User2 / Anti-CR / Push Lock	
AGC	Adjustable	
Gamma Correction	0.45	
Sync Mode	Internal	
Privacy Masking	8	
Motion Detection	4	
OSD Control	Yes	
Languages	English, Chinese, Japanese, German, French, Russian, Portuguese, Spanish	
Video Output	1.0 Vp-p, 75 Ohm	
Input Voltage	12VDC	
Current Consumption	100 mA (IR LED OFF) + 150 mA (IR LED ON)	
Operation Temperature	-10°C to +50°C under 90%RH (non-condensing)	
Rating	IP66	
Dimension	146 (D) x 89 (H)mm	
Weight	1000g	
Certificate	CE, FCC, C-tick	


\*Note: Honeywell reserves the right, without notification, to make changes in product design or specifications.

### CADC600PIV-V

[www.black.honeywell.com](http://www.black.honeywell.com)

#### 600TVL HIGH RESOLUTION VANDALPROOF IR VARIFOCAI DOME CAMERA

##### DIMENSION

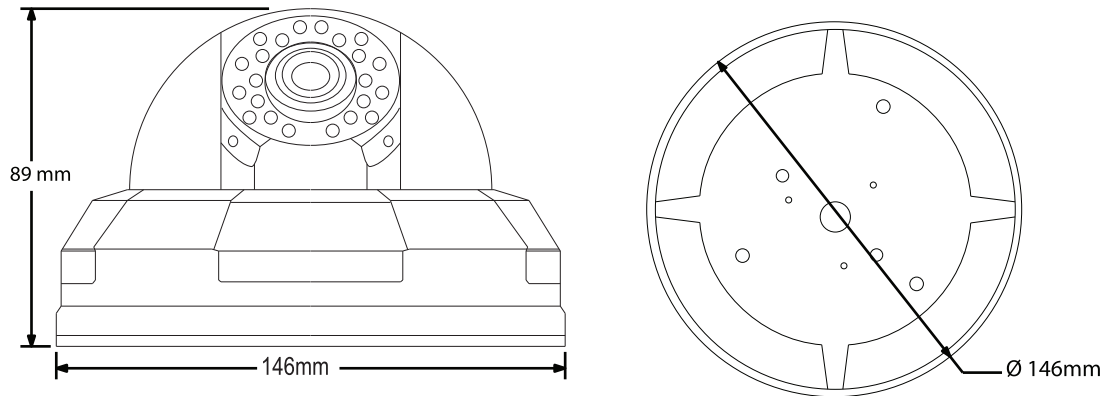

##### ORDERING

CADC600PIV-V	Vandal Proof IR Vari-focal Dome Camera, 2.8 - 10mm vari-focal, 600TVL, 0 Lux (IR LED ON), Day/Night, IR distance: 10 - 15m, OSD, 12 VDC, IP66, PAL
CADC600NIV-V	Vandal Proof IR Vari-focal Dome Camera, 2.8 - 10mm vari-focal, 600TVL, 0 Lux (IR LED ON), Day/Night, IR distance: 10 - 15m, OSD, 12 VDC, IP66, NTSC

# CADC600PIV-V

---

600TVL HIGH RESOLUTION VANDALPROOF IR  
VARIFOCAL DOME CAMERA

For more information:

Security Hong Kong  
Security Australia National Sales Hotline  
Security India

Tel: (852) 2405 2323  
Tel: 1300 765 532  
Tel: (91) 124 4029800

[www.black.honeywell.com](http://www.black.honeywell.com)  
[security.black@honeywell.com](mailto:security.black@honeywell.com)

**Honeywell Security Group**  
Automation & Control Solutions  
Honeywell International Inc.  
[www.security.honeywell.com](http://www.security.honeywell.com)

Aug 2012  
© 2012 Honeywell International Inc.

**VISTA**  
**Honeywell**