



Column Speakers

CS-51H CS-512H CS-513H CS-514H

Features:

The standard indoor / outdoor weatherproof speakers provide hi-fi sound quality. They are suitable for use at garden, swimming pool, stadium and tennis court.

- Installation: wall mount.
- Enclosure: Aluminum, metal grille,
- 4" full range speakers.

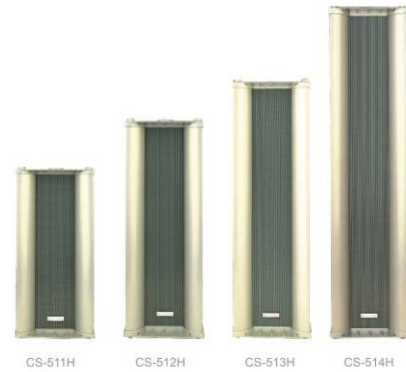



SPECIFICATIONS	CS-511H	CS-512H	CS-513H	CS-514H
Max power	15 W	30 W	45 W	60 W
Rated power	10 W	20 W	30 W	40 W
Power taps @ 100V	10W / 5 W	20W / 10 W	30W / 15 W	40W / 20 W
Power taps @ 70V	5 W / 2.5 W	10 W / 5 W	15 W / 7.5 W	20 W / 10 W
Sensitivity	90 dB	95 dB	94 dB	94 dB
Frequency range (-10dB)	120 Hz - 20 kHz	140 Hz - 20 kHz	120 Hz - 20 kHz	120 Hz - 20 kHz
Vertical Dispersion	90°	80°	80°	80°
Horizontal Dispersion	90°	90°	90°	90°
Rated input voltage	100 V/70 V	100 V/70 V	100 V/70 V	100 V/70 V
Rated impedance	1K Ω/2K Ω	500 Ω/1K Ω	333 Ω / 667 Ω	250 Ω / 500 Ω
Dimensions(W x Hx D)	145 x 270 x 123 mm	145 x 390 x 123 mm	145 x 505 x 123 mm	145 x 620 x 123 mm
Weight	2.55 kg	4.1 kg	4.35 kg	5.65 kg
Color	Champagne	Champagne	Champagne	Champagne
Materials(enclosure and grille)	Aluminum and iron	Aluminum and iron	Aluminum and iron	Aluminum and iron
Protection level	IP44	IP44	IP44	IP44

CK-31 CK-312 CK-313 CK-314

Features:

The metal case makes it more durable Beautiful shape and easy to install Suitable for indoor/outdoor application, such as gym and conference room.

- Enclosure: Aluminum, metal grille.
- 2.5 "full range speakers with clear sound

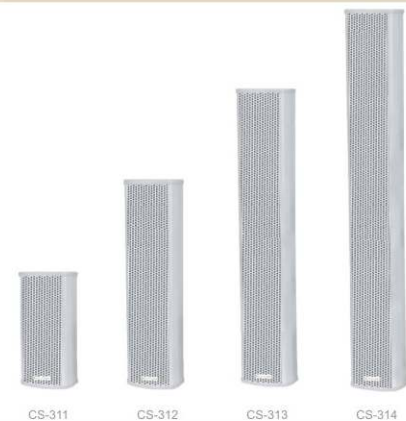

SPECIFICATIONS	CK-311	CK-312	CK-313	CK-314
Max power	15 W	30 W	45 W	60 W
Rated power	10 W	20 W	30 W	40 W
Power taps @ 100V	10W / 5 W	20W / 10 W	30W / 15 W	40W / 20 W
Power taps @ 70V	5 W / 2.5 W	10 W / 5 W	15 W / 7.5 W	20 W / 10 W
Sensitivity	87 dB	89 dB	93dB	97dB
Frequency range (-10dB)	140 Hz - 15 kHz	180 Hz - 20 kHz	180 Hz - 20 kHz	180 Hz - 20 kHz
Vertical Dispersion	90°	90°	90°	80°
Horizontal Dispersion	100°	110°	110°	110°
Rated input voltage	100 V/70 V	100 V/70 V	100 V/70 V	100 V/70 V
Rated impedance	1 k Ω / 2 k Ω	500 Ω / 1 k Ω	333 Ω / 667 Ω	250 Ω / 500 Ω
Dimensions(W x Hx D)	105 x 260 x 75 mm	105 x 402 x 75 mm	105 x 546 x 75 mm	105 x 690 x 75 mm
Weight	1.22 kg	1.98 kg	2.74 kg	3.52 kg
Color	White	White	White	White
Materials(enclosure and grille)	Aluminum and iron	Aluminum and iron	Aluminum and iron	Aluminum and iron
Protection level	IP44	IP44	IP44	IP44