

EV-200M

VOICE ANNOUNCEMENT BOARD



The EV-200M is a playback-only Voice Announcing board to play back the messages recorded on The EV-350R. The EV-200M is designed to be built in the VM-2000 series amplifiers and VX-2000 system.


Key features

- For VX-2000
- Up to 8 messages, can be used for alert & evacuation, general messages or music
- Includes compact memory flash card
- Single source playback
- Distortion: under 0.3 % (44.1 kHz, recording method: extremely high)

Specifications

Power Source	24 V DC, 0.2 A
Power Consumption	5 W
Frequency Response	20 Hz – 20 kHz (44.1 kHz sampling) 20 Hz – 14 kHz (32 kHz sampling)
Distortion	Under 0.3% (44.1 kHz, recording method: Extremely High)
Audio Output	0 dB*
Playback Mode	Single source playback
Number of Playback Program	8 programs
Operating Temperature	0 – 50°C
Operating Humidity	Under 90% (no condensation)
Dimensions	120 (w) x 18.6 (h) x 121 (d) mm
Weight	120 g

Dimensions

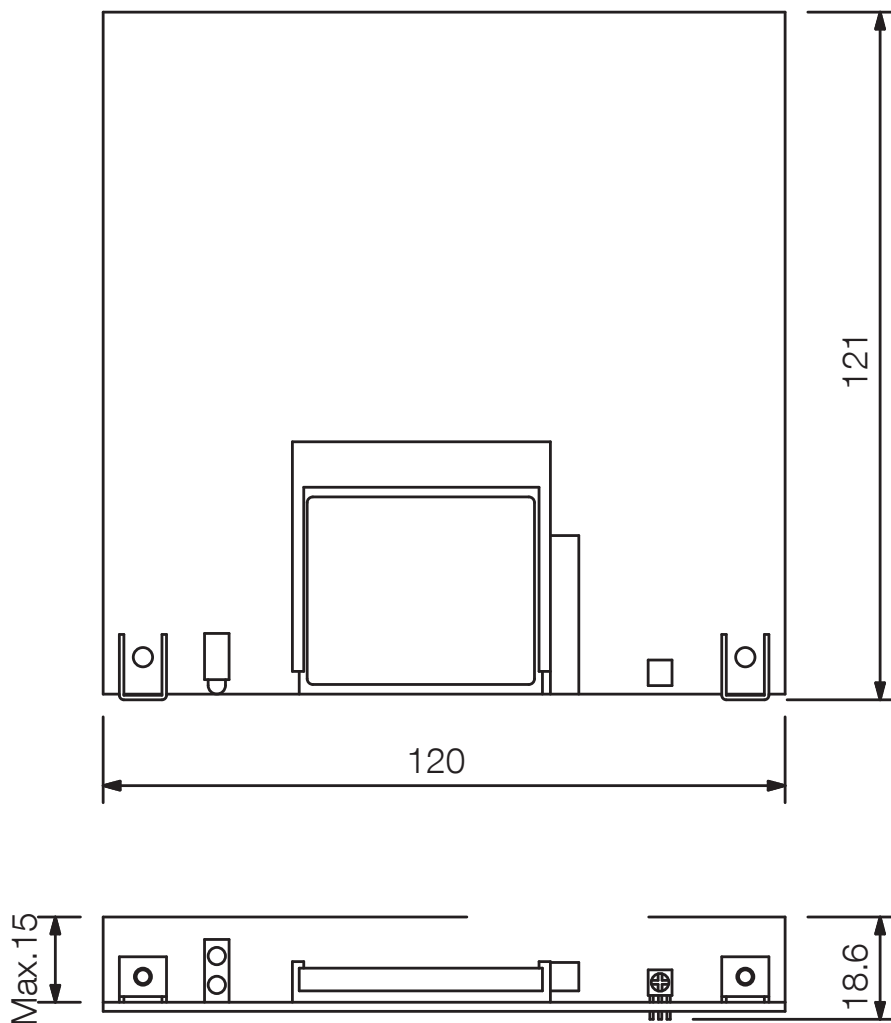

UNIT:mm

SCALE:1/2

A&E specifications

Digital audio signal playback device for playback of 8 different messages that can be composed of up to 127 individual texts, can for each message the output volume will be set and stored. Retrieval of messages remotely controllable.

Self monitoring of the module on CPU and memory card error, including removing the memory card, monitoring of the pathway to the ELA management amplifier. Status indicators via LEDs.

Including 128 MB CF memory card