



# Network Video Recorder

## NVR64COP12M16S PRO



## Key Features

- Support Ultra 265/H.265/H.264 video formats
- 64-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- Support 2-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI1, HDMI2 and VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- Redundant power supply
- 2 decoding cards optional, up to 12-ch HDMI
- Support HDD hot swap with RAID 0, 1, 5, 6, 10, 50, 60 storage scheme configurable
- 16 SATA HDDs, up to 10TB for each HDD
- Support 2 mini SAS Interfaces
- Support 12V power output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade
- Support N+1 Hot spare



[www.iid2secure.nl](http://www.iid2secure.nl)

Extra Benefits, Less Price

Finestrat,19, 03530 La Nucia, Alicante, Spain

© IID Secure Tech S.L.U. 2019

Heemdtedestraat 16 Amsterdam, Netherlands

[Support@iid2secure.nl](mailto:Support@iid2secure.nl)

+31614762425

Data Subject to change without notice



## Specifications

<b>Model</b>	<b>NVR64C0P12M16S PRO</b>
<b>Video/Audio Input</b>	
IP Video Input	64-ch
Two-way Audio Input	1-ch, BNC
<b>Network</b>	
Incoming Bandwidth	500Mbps
Outgoing Bandwidth	384Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PP PoE
<b>Video/Audio Output</b>	
HDMI/VGA Output	VGA:1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI1: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI2: 4K (3840x2160)/30Hz,1920x1080p/60Hz,1920x1080p/50Hz,1600x1200/60Hz,1280x1024/60Hz,1280x720/60Hz,1024x768/60Hz
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, BNC
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
<b>Decoding</b>	
Decoding format	Ultra 265, H.265, H.264
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	4 x 12MP@20, 4 x 4K@30, 16 x 1080p@30, 36 x 720p@30, 64 x D1
<b>Hard Disk</b>	
SATA	16 SATA interfaces
Capacity	up to 10TB for each HDD
eSATA	1 eSATA interface
Mini SAS	2 mini SAS ports
<b>Smart</b>	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
VCA Search	Face search, Behavior search
Statistical Analysis	People counting
<b>Disk Array</b>	
Array Type	RAID 0/1/5/6/10/50/60




[www.iid2secure.nl](http://www.iid2secure.nl)  
Extra Benefits, Less Price  
Finestrat,19, 03530 La Nucia, Alicante, Spain  
© IID Secure Tech S.L.U. 2019

Heemdtedestraat 16 Amsterdam, Netherlands  
Support@iid2secure.nl  
+31614762425  
Data Subject to change without notice



External Interface	
Network Interface	4 RJ-45 10M/100M/1000M adaptive Ethernet Interface 2 1000M SFP Ethernet Interface
Serial Interface	1 x RS232, 1 x RS485
USB Interface	Rear panel: 4 x USB3.0
Alarm In	24-ch
Alarm Out	8-ch
Decoding Card (optional)	2 slots (4-ch HDMI or 6-ch HDMI outputs per card)
Power Output	12V
General	
Power Supply	100 ~ 240V AC Power Consumption: ≤ 50 W (without HDD)
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
Chassis	19-inch rack-mounted 3U chassis
Dimensions	482mm × 477mm × 131mm (18.8" × 19.0" × 5.1")
Weight (without HDD)	≤ 10 Kg (22.05 lb)


## Dimensions

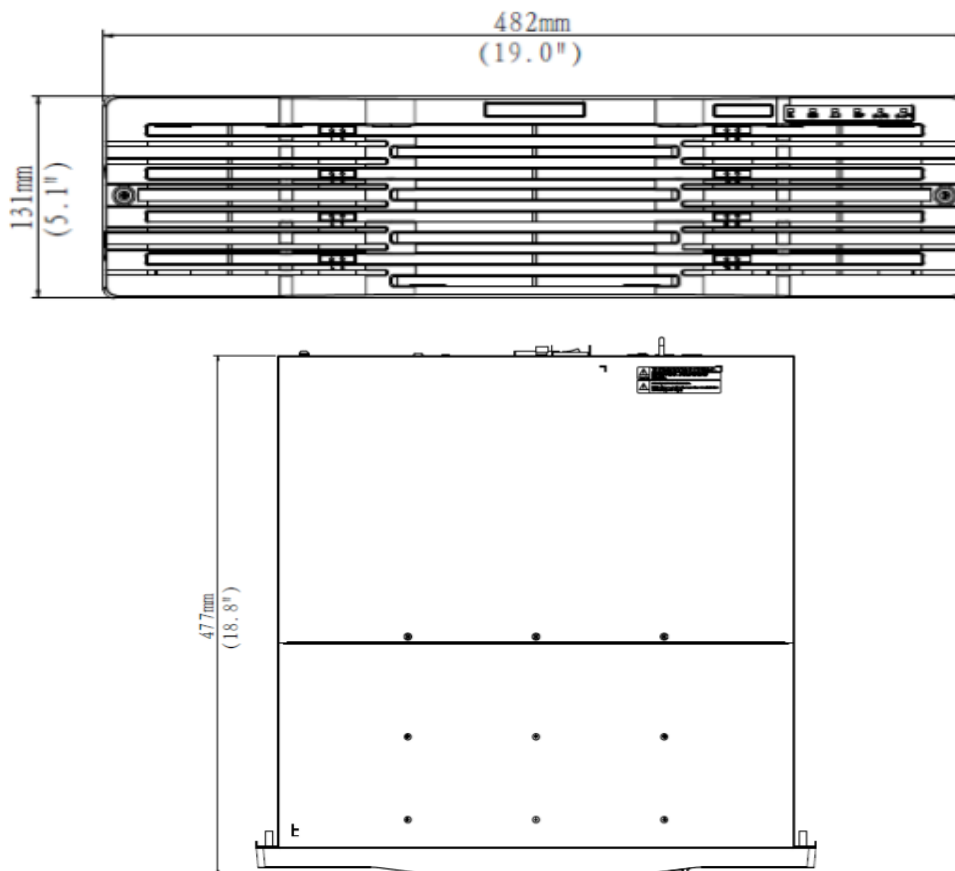

[www.iid2secure.nl](http://www.iid2secure.nl)  
Extra Benefits, Less Price  
Finestrat, 19, 03530 La Nucia, Alicante, Spain  
© IID Secure Tech S.L.U. 2019

Heemtedestraat 16 Amsterdam, Netherlands  
Support@iid2secure.nl  
+31614762425  
Data Subject to change without notice

## Rear Panel

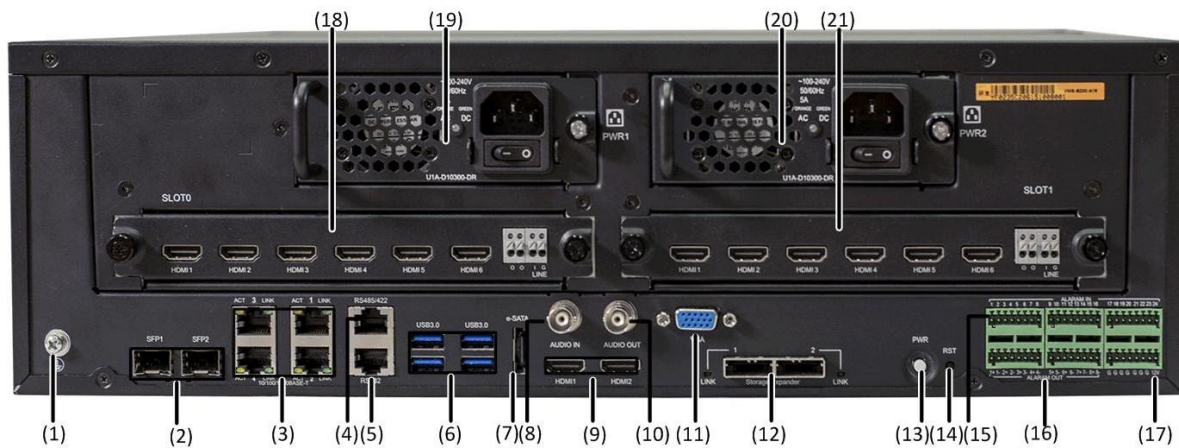

NVR516

(1) GND	(2) SFP Interface	(3) Adaptive Interface
(4) RS485	(5) RS232	(6) USB
(7) eSATA	(8) Audio Input	(9) HDMI Output
(10) Audio Output	(11) VGA Output	(12) mini SAS
(13) Power Button	(14) RST	(15) Alarm Input
(16) Alarm Output	(17) 12V DC Output	(18) Decoding Card 1 (optional)
(19) Power Supply 1	(20) Power Supply 2(optional)	(21) Decoding Card 2 (optional)

