

features


- Industrial construction
- Terminal block wiring
- Ultra-bright LED
- Suitable for analogue addressable or conventional systems.

The RI/W/3V remote indicator unit is designed for fire detection systems requiring local indication of an individual or group of fire detectors in alarm. The unit is fitted with LED providing a wide area of illumination and high on/off contrast for easy viewing.

The range is suitable for both analogue addressable and conventional Fire Alarm Systems with three terminals simplifying connection to either type of system.

mechanical

Colour	White with Red lettering
Material	Flame retardant ABS
Dimensions	86 x 86 mm (H x W)
Mounting	Designed to fit to a standard UK single gang bakbox

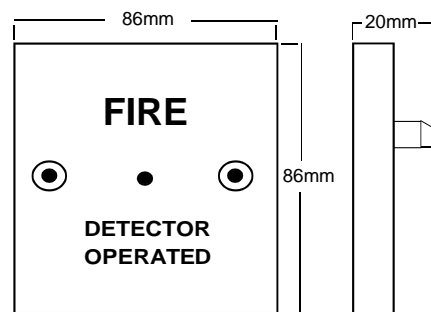

Charles Avenue, Burgess Hill
West Sussex, RH15 9UF
United Kingdom

Tel: +44 (0) 1444 23 55 56
Fax: +44 (0) 1444 25 44 10
Email: sales@morleyias.co.uk
www.morley-ias.co.uk




Remote Indicator Unit Data Sheet

323(0802)

electrical

Input voltage 5 to 28 Vdc
Current dependent on voltage



For conventional systems
connect across load resistor
(terminals 1 & 3)

For most intelligent systems
connect across LED
(terminals 2 & 3)

part numbers

RI/W/3V Remote indicator unit

Your Local Distributor