

A.T.T ZONE MIXING AMPLIFIER TA-1060/1120



FEATURES

- Pre-Amp out / Amp-in for extensions to power amplifiers.
- Individual gain control for channel 1-5.
- 4 mic input+4line inputs two/four tone Chime, 2 siren tones.
- Voice priority for Mic 1.
- Telephone Input & Music On Hold (tuner only).
- Optional modules
(DMT-100, CDP-100MU, CDR-100RDSU, TP-100RDS).
- Bass / treble tone control.
- 4 speaker outputs.
- Remote Chime with external terminal.
- Individual 4 Zone speaker selector .
- VU output meter.
- 100V / 70V output selector.
- AC / DC 24V.
- Bass & treble control for pack series.


SPECIFICATIONS

TECHNICAL DATA	TA-1060	TA-1120
THD AT 1KHZ	Less than 1%	Less than 1%
RATED OUTPUT(at 1% THD)	60W(RMS)	120W(RMS)
POWER CONSUMPTION	145W	295W
FREQUENCY RESPONSE(±3DB)	80Hz to 15kHz	
EQUALIZER	BASS : ±10dB at 100Hz, TREBLE : ±10dB at 10kHz	
SIGNAL TO NOISE RATIO	Line : More than 70dB, MIC : More than 60dB	
INPUT	MIC 1~4 : 3mV, LINE : 300mV, PHONE : 2.4mV	
POWER	AC230V/50Hz, DC24V	
DIMENSIONS (MM)	420(W) x 110(H) x 320(D) mm	
WEIGHT(KG)	10.5kg	12.5kg

MIXING AMPLIFIERS

RMK-100 (Option)


Rack Mounting Bracket For TA-1060/1120

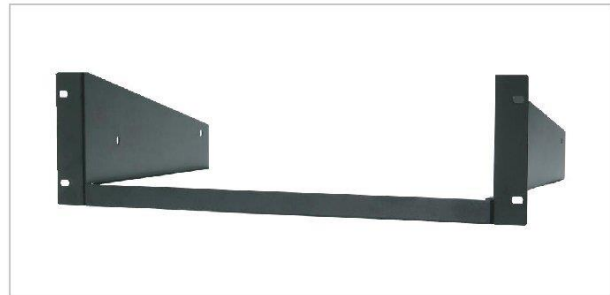

MODULE SERIES (Option)

	CDP-100MU CD & USB Player
	CDR-100RDSU CD & Receiver & USB
	DMT-100 Digital Message & Timer Module
	TP-100RDS Digital RDS Tuner

DRAWING

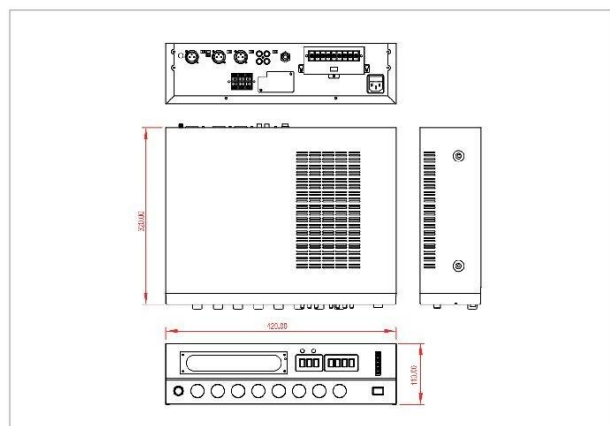

A.T.T ZONE MIXING AMPLIFIER TA-1060/1120

STANDARD APPLICATION

