



XVR8A16D5M1S



Key Features

- Support AHD/CVI/TVI/IP/Analog Camera Input
- Up to HD 5MP and IP 5MP Resolution Recording
- Support HD Output. VGA and CVBS Video Output
- Support Max. 8CH HD or 16CH IP Camera Input
- Support 1 SATA up to 8TB Capacity



www.iid2secure.nl
Extra Benefits, Less Price
Finestrat,19, 03530 La Nucia, Alicante, Spain
© IID Secure Tech S.L.U. 2019

Heemtedestraat 16 Amsterdam, Netherlands
Support@iid2secure.nl
+31614762425
Data Subject to change without notice



Specification

Model NO.	XVR8A16D5M1S
System	
Main Processor	MC6630
Operating System	Embedded LINUX
Video	
Input	Normal Mode: Analog: 8*(TVI/AHD: 5M@12fps; AHD/TVI/CVI: 4M@15fps; AHD/TVI: 3M@18fps; AHD/TVI/CVI: 1080P/720P; Analog: 960H) Analog+ Network: 2*Analog(5MP)+7*network(MAX 5MP),4*Analog(5MP)+5*network(MAX 5MP),6*Analog(5MP)+3*network(MAX 5MP) Network: 16*5MP/4MP/3MP/1080P/960P/720P(Total incoming bandwidth ≤48M)
Input	8CH BNC
Signal Type	Analog/AHD/CVI/TVI 2.0/TVI 3.0/Network
Output	1HD,1 VGA, CVBS
Audio	
Input	2 Channel, RCA
Two-way Audio	NO
Output	1 Channel, RCA
Alarm	
Sensor Input	4 CH
Output	1 CH
Motion Detection	8 Channel(max 16 Channel in pure network mode)
Trigger Events	Recording, Email, Screen tips, Buzzer, Push notifications(motion detection)
Email Alarm	Send Image to The Designated E-mail
PTZ	
Interface	RS485
Protocol	Pelco-D, Pelco-P
Baud Rate	110~921600
Address	0~255
Display	
VGA	Resolution: 1920 × 1080P/60Hz, 1280 × 1024/60Hz, 1280 × 720 60Hz,1024 × 768/60Hz
HD Output	Resolution: 1920 × 1080P/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz,1024 × 768/60Hz
Display Split	16 Channel/9 Channel/8 Channel/4 Channel / 1Channel
Privacy Masking	3 Rectangular Zones (Each camera)
OSD	Camera title, Time, Video loss, Alarm, Motion detection, Recording
Recording	
Video Compression	H.265+/H.265/H.264+/H.264
Audio Compression	G.711U/G.711A
Resolution	5MP_Lite(1296×1952),4MP_Lite(1280×1440),3MP_Lite(1024×1536),1080N(960×1080),720P(1280×720),960H(P:960×576/N:960×480)
Video Quality	Lowest/Low/Ordinary/Good/Better/Best



www.iid2secure.nl
Extra Benefits, Less Price
Finestrat,19, 03530 La Nucia, Alicante, Spain
© IID Secure Tech S.L.U. 2019

Heemdtedestraat 16 Amsterdam, Netherlands
Support@iid2secure.nl
+31614762425
Data Subject to change without notice






Record Rate	Analog: PAL: 5MP_Lite(1296x1952 8*6fps),4MP_Lite(1280x1440 8*8fps),3MP_Lite(1024x1536 8*10fps),1080N(960x1080 8*15fps),720P(1280x720 8*15fps), 960H(960x576 8*25fps) NTSC:5MP_Lite(1296x1944 8*6fps),4MP_Lite(1280x1440 8*8fps),3MP_Lite(1024x1536 8*10fps),1080N(960x1080 8*15fps),720P(1280x720 8*15fps), 960H(960x576 8*30fps) Pure IP(H.265): PAL: 5MP@8x25fps,4MP@12x25fps,3MP@12x25fps,1080P@12x25fps,960P@12x25fps,720P@12x25fps,D1@12x25fps NTSC: 5MP@8x30fps,4MP@12x30fps,3MP@12x30fps,1080P@12x30fps, 960P@12x30fps, 720P@12x30fps, D1@12x30fps
Record Mode	Manual\Timer\Motion Detection\Alarm Input\Motion and Alarm
Playback & Backup	
Decode Capability	2CH 1080P@30fps
Sync Playback	Pure Analog: 4CH 960H@25fps, 4CH 720P@15fps, 4CH 1080N@15fps, 4CH 5M_LITE@6fps, 4CH 4M_LITE@8fps, 4CH 3M_LITE@10fps Mixture mode: 4CH 720P@25fps, 2CH 1080P@25fps, 1CH 5MP@25fps Pure Network: 4CH 720P@25fps, 2CH 1080P@25fps, 1CH 5MP@25fps
Remote Playback	4 Channel / 1Channel
Search Mode	ALL, Channel, Manual, Time, Date, Motion Detection, Alarm, Motion and Alarm
Playback Functions	Play, Pause, Stop, Fast play, Slow play, Rewind, Single frame forward/back, Digital Zoom, Full screen
Smart Phone Playback	4 Channel
Backup Mode	USB Device(with format FAT 32)/Network/FTP
Network	
Interface	1 RJ45 10M/100M Adaptive Ethernet Interface
Network Functions	TCP/IP, HTTP, UPnP, DNS, NTP, SMTP, DHCP, FTP, DDNS, RTP, RTSP, RTCP
DDNS	Dyndns, change ip, no-ip, Oray, A-PRESS, MYQSEE, SKDDNS, SMART-EYES, ZEBEYE,HDPROVN
Web Browser	IE8-11, Google Chrome (lower than Ver44), Firefox (lower than Ver53)
CMS Software	Support Windows 7/ Windows 8/Windows 10
Extra Stream	CIF/D1(1-12fps)
Smart Phone	iPhone, iPad, Android ,Android pad
Hard Disk Driver	
Interface Type	1 SATA Interface
Capacity	1 SATA Hard Disk (2.5"/3.5" SATA, Up to 8TB)
General	
Language	Simplified Chinese, Traditional Chinese, English, Polish, Czech, Russian, Thai, Hebrew, Arabic, Bulgarian, Japanese, German, French, Portuguese, Turkic, Spanish, Italian, Hungarian, Romanian, Korean, Dutch, Greek, Vietnamese,
UTC Control	YES
USB Interface	2 USB 2.0 Interfaces
Power consumption	DC 12V/2A ≤6W (Without Hard Disk)
Working Environment	-10~55°C/10~90%
Dimension (WxDxH)	260*215*43(mm)
Weight	2kg (Without HDD)



www.iid2secure.nl
 Extra Benefits, Less Price
 Finestrat,19, 03530 La Nucia, Alicante, Spain
 © IID Secure Tech S.L.U. 2019

Heemstedestraat 16 Amsterdam, Netherlands
 Support@iid2secure.nl
 +31614762425
 Data Subject to change without notice

Dimensions

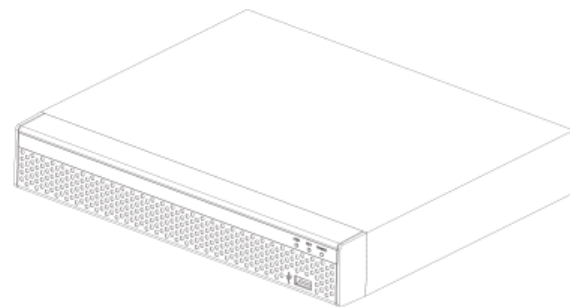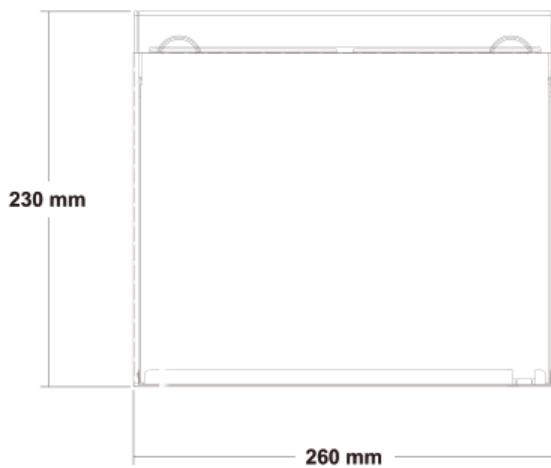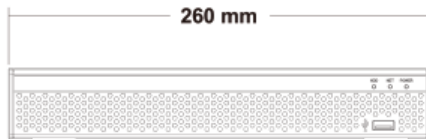

www.iid2secure.nl

Extra Benefits, Less Price

Finestrat,19, 03530 La Nucia, Alicante, Spain

© IID Secure Tech S.L.U. 2019

Heemdedestraat 16 Amsterdam, Netherlands

Support@iid2secure.nl

+31614762425

Data Subject to change without notice