

## DM-1300

### DYNAMIC MICROPHONE



The DM-1300 is a microphone suited to both vocal and speech applications.


### Key features

- Switching and handling noise suppression
- With (balanced) XLR-connector
- 10 m cable with (unbalanced) phone plug
- Adapter for stand mounting is provided

## Specifications

Type	Moving coil microphone
Directivity	Unidirectional
Impedance	600 $\Omega$ , balanced
Sensitivity	-54 dB (1 kHz 0 dB=1 V/Pa)
Frequency Response	70 - 15,000 Hz
Cable	Single-core shielded cable, unbalanced
Cable Length	10 m
Output Terminal	Phone plug
Talk Switch	Short-off, slide switch
Finish	Body: Die-cast zinc, metallic gray, paint Head: Steel/zinc-plated steel wire, metallic gray, paint
Dimensions	$\varnothing$ 51 x 170 mm (without connection cable)
Weight	245 g (without connection cable)
Included Accessories	Microphone holder (U5/16)...1

# Dimensions

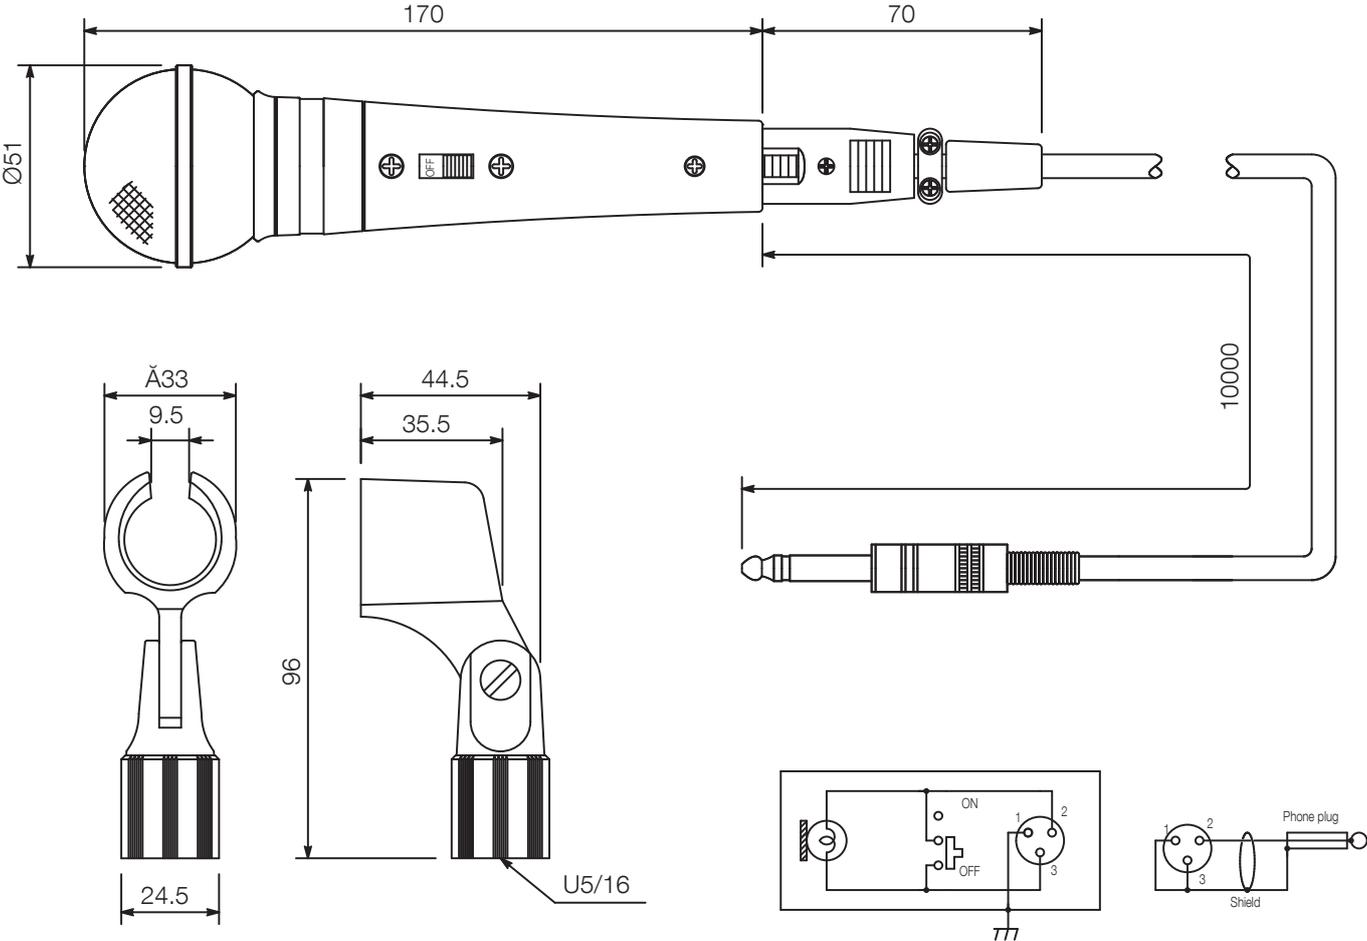

Circuit Diagram

UNIT:mm SCALE:1/2

## A&E specifications

Dynamic handheld microphone in rugged zinc die-cast enclosure, effective suppression of handling noise, wind / pop screen, special extremely low-noise switch, XLR connector, incl. 10 m cable with female XLR / jack plug and stand clamp.