

Features

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 6" +1.5" two ways speaker unit
- Power taps 5w-10w-20w-40w @100V plus 8ohm
- Metal grille, ABS enclosure and stainless mounting bracket
- Fashion speaker of white color

Description

The **F-61W** is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 6"+1.5" two ways speaker driver is designed of wide frequency response 100-20kHz, the multiple power taps 5W, 10W, 20W & 40W are helpful for different applications varies from room size and ambient noise surroundings.


The metal grille, ABS enclosure and stainless mounting bracket are of white color. Easy and secure wall mount installation through the supplied mounting bracket.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.


**Specification**

Model	F-61W	
Power Taps @100V	5W, 10W, 20W, 40W	
Power Taps @70V	2.5W, 5W, 10W, 20W, 40W	
Transformer Impedance	2KΩ/1KΩ/500Ω/250Ω/125Ω	
Input	70V/100V/8Ω	
SPL(1W/1M)	89dB	
Max. SPL (Rated W/1M)	105dB	
Frequency Response (-10dB)	100-20KHz	
Finish	Baffle: ABS, Black/White	Grille: Steel, Black/White
Speaker Driver	6" x 1	1.5" x 1
Dimensions	340 x 220 x 225mm	
Weight	4.1kg	
Mounting	With mounting bracket fixed by screw	

Appearance:

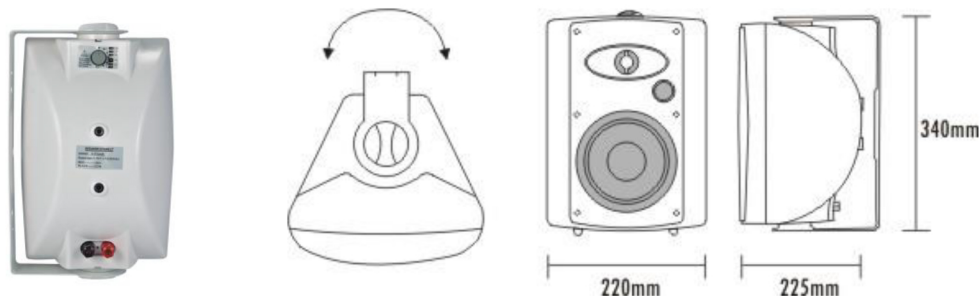

Direction Diagram:

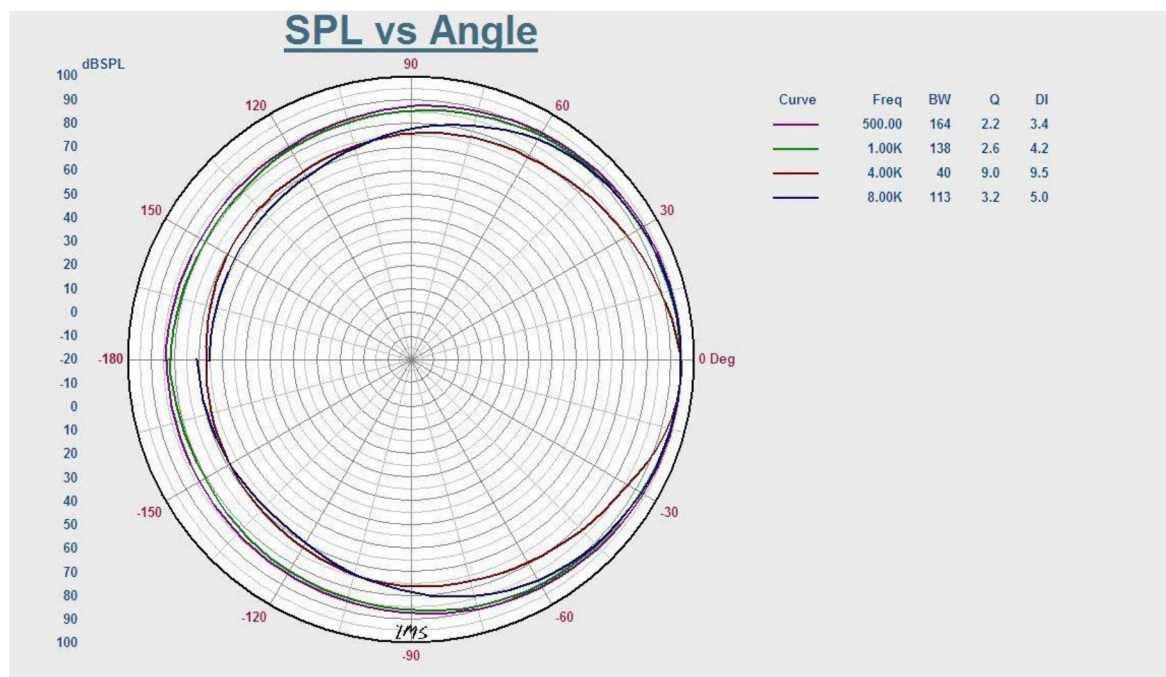

Frequency Response:

