



# IIDMDG-3000V4

## High Sensitivity Digital Walkthrough Metal Detector



### Product Introduction

IIDMDG-3000V4 high sensitivity digital walkthrough metal detector use excellent Digital pulse technique, has high detection sensitivity of the magnetic metal and nonmagnetic metal, and good recognition for personal items such as coins, keys, belt buckle, etc. multi-layered overlapping coil design, with high-brightness LEDs to show the horizontal position of metal objects accurately, which can be easy for operator to make judgment.

### Technology Features

- ◆ There are 100 working frequency choose ,and strong anti-interference.
- ◆ Very stable performance with digital pulse technology.
- ◆ Modular design for easy installation and disassembly.
- ◆ Automatic sleep.
- ◆ Automatically power on , self test, environment adaptive.
- ◆ 7-inch color screen, display mode optional.
- ◆ 45 Independent Zone.
- ◆ 30 application modes to choose from.
- ◆ Sensitivity level: free to detect a dime, no blind zone.

### Applications

- ◆ Prison
- ◆ Airport
- ◆ Government law enforcement
- ◆ Factories
- ◆ Bank
- ◆ Venues

All Information Subject to Real Equipment



[www.iid2secure.nl](http://www.iid2secure.nl)  
Extra Benefits, Less Price  
Finestrat,19, 03530 La Nucia, Alicante, Spain  
© IID Secure Tech S.L.U. 2019


Heemtedestraat 16 Amsterdam, Netherlands  
Support@iid2secure.nl  
+31614762425  
Data Subject to change without notice

## Technology Data

- Detection Area: 1/8/15/16/24/30/45 area can be set.
- Overall detection sensitivity: 300-level adjustment, the higher the number, the higher the sensitivity.
- Partition sensitivity adjustment: 300 levels adjustable in each zone. The higher the number, the higher the sensitivity.
- Vibration protection: adjustable sensitivity (0 — 255), can prevents false alarms caused by vibration interference.
- System detection function: It can manually detect the left and right zones and sound, LED working status.
- Passing speed: can be adjusted from the fastest 100 people / minute.
- Counting function: intelligent passenger flow and alarm counting function, can record 20,000 pieces alarm record and automatically save, can query the alarm record in time period in real time.
- Chinese and English display: can select the appropriate language according to your needs, can customize the language.
- 7.0-inch LCD color display: can be divided into indoor and outdoor display mode; LCD backlight brightness can be adjusted from 0%-100%.
- Manage encryption: prevent data from being illegally modified or mishandled, resulting in abnormal product operation
- Backup power supply: 4/8/10 hours battery power supply (optional)
- Networking function: can be connected to the computer to realize remote parameter setting/query function (optional)
- Low power consumption: <15W ultra low power consumption
- IP Grade ..... P65

## Installation Data

- Size/Weight ..... 2240mm (L)\*855mm (W)\*600mm (H)/About 55KG
- Tunnel Size ..... 1980mm (L)\*765mm (W)\*600mm (H)
- Power Supply ..... External power adapter, AC100-240V/50-60Hz
- Power Consumption ..... <15W
- Working Temperature..... -28°C~+47°C

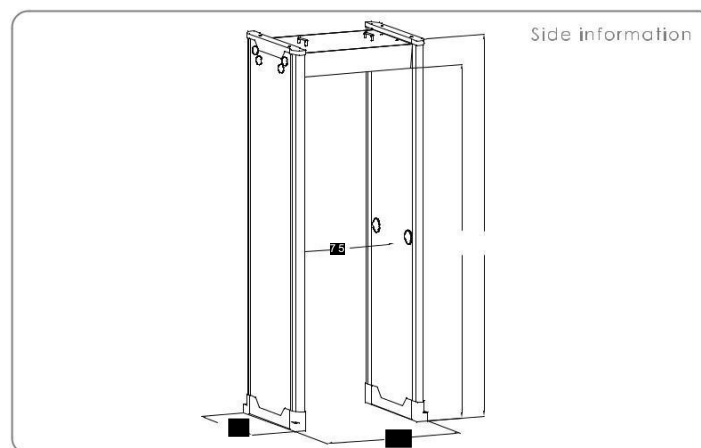

Notice : Specifications are subject to change without notice.

